

# Modular timers 1 - 6 - 8 - 16 A



Building  
automation



Elevators  
and lifts



Automation for  
blinds, grilles  
and shutters




Hoists and  
cranes



Panels for  
electrical  
distribution



Door and  
gate openers

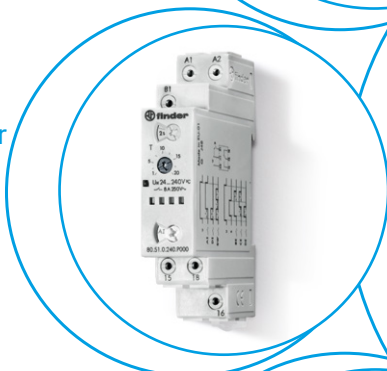

80  
SERIES



### Multi-function timer range

#### 80.01 - Multi-function & multi-voltage

**80.01 NFC - Multi-function & multi-voltage**  
Can be programmed via smartphone with NFC communication using the Finder Toolbox app (for Android and iOS).

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.01/80.01 NFC  
Box clamp



FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

### Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/30	16/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	4000	4000
Rated load AC15 (230 V AC)	VA	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55
Breaking capacity DC1: 24/110/220 V	A	16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)
Standard contact material		AgNi	AgNi

### Supply specification

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	12...240	12...240
	V DC	12...240	12...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1	< 1.8/< 1
Operating range	V AC	10.8...265	10.8...265
	V DC	10.8...265	10.8...265

### Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h	
Repeatability	%	± 1	± 1
Recovery time	ms	100	100
Minimum control impulse	ms	50	50
Setting accuracy-full range	%	± 5	± 5
Electrical life at rated load in AC1	cycles	50 · 10 <sup>3</sup>	50 · 10 <sup>3</sup>
Ambient temperature range	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20


Approvals (according to type)

### 80.01




- Multi-voltage
- Multi-function

**AI:** On-delay  
**DI:** Interval  
**SW:** Symmetrical flasher (starting pulse on)  
**BE:** Off-delay with control signal  
**CE:** On- and off-delay with control signal  
**DE:** Interval with control signal on



Wiring diagram  
(without control signal)




Wiring diagram  
(with control signal)

### NEW 80.01 NFC




- Multi-voltage
- Multi-function
- Programmable via NFC

**AI:** On-delay  
**DI:** Interval  
**LI:** Asymmetrical flasher (starting pulse ON)  
**BE:** Off-delay with control signal  
**CEb:** ON and OFF independent delays with control signal  
**DE:** Interval with control signal on  
**LE:** Asymmetrical flasher (starting pulse on) with control signal



Wiring diagram  
(without control signal)



Wiring diagram  
(with control signal)

**Mono-function timer range****80.11 - On-delay, multi-voltage****80.21 - Interval, multi-voltage****80.41 - Off-delay with control signal, multi-voltage**

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.11/80.21/80.41

Box clamp



FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

**Contact specification**

Contact configuration		1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/30	16/30	16/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/400
Rated load AC1	VA	4000	4000	4000
Rated load AC15 (230 V AC)	VA	750	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55	0.55
Breaking capacity DC1: 24/110/220 V	A	16/0.3/0.12	16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)	500 (10/5)
Standard contact material		AgNi	AgNi	AgNi

**Supply specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	24...240	24...240	24...240
	V DC	24...240	24...240	24...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1	< 1.8/< 1	< 1.8/< 1
Operating range	V AC	16.8...265	16.8...265	16.8...265
	V DC	16.8...265	16.8...265	16.8...265

**Technical data**

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h		
Repeatability	%	± 1	± 1	± 1
Recovery time	ms	100	100	100
Minimum control impulse	ms	—	—	50
Setting accuracy-full range	%	± 5	± 5	± 5
Electrical life at rated load in AC1	cycles	50 · 10 <sup>3</sup>	50 · 10 <sup>3</sup>	50 · 10 <sup>3</sup>
Ambient temperature range	°C	-20...+60	-20...+60	-20...+60
Protection category		IP 20	IP 20	IP 20

**Approvals** (according to type)

# Mono-function timer range

**80.61 - Power off-delay (True off-delay), multi-voltage**

**80.82 - Star-delta, multi-voltage**

**80.91 - Asymmetrical flasher, multi-voltage**

- 17.5 mm wide
- Rotary range selector, and timing trimmer
- Four time scales from 0.05s to 180 s (type 80.61)
- Four time scales from 0.1 s to 20min (type 80.82)
- Six time scales from 0.1 s to 24 h (type 80.91)
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.61/80.82/80.91  
Box clamp



FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

## Contact specification

Contact configuration		1 CO (SPDT)	2 NO (DPST-NO)	1 CO (SPDT)
Rated current/Maximum peak current	A	8/15	6/10	16/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/400
Rated load AC1	VA	2000	1500	4000
Rated load AC15 (230 V AC)	VA	400	300	750
Single phase motor rating (230 V AC)	kW	0.3	—	0.55
Breaking capacity DC1: 24/110/220 V	A	8/0.3/0.12	6/0.2/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	500 (12/10)	500 (10/5)
Standard contact material		AgNi	AgNi	AgNi

## Supply specification








Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	24...240	24...240	12...240
	V DC	24...220	24...240	12...240
Rated power AC/DC	VA (50 Hz)/W	< 0.6/< 0.6	< 1.3/< 0.8	< 1.8/< 1
Operating range	V AC	16.8...265	16.8...265	10.8...265
	V DC	16.8...242	16.8...265	10.8...265

## Technical data

Specified time range		(0.05...2)s, (1...16)s, (8...70)s, (50...180)s	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1	± 1	± 1
Recovery time	ms	—	100	100
Minimum control impulse	ms	500 (A1-A2)	—	50
Setting accuracy-full range	%	± 5	± 5	± 5
Electrical life at rated load in AC1	cycles	100 · 10 <sup>3</sup>	60 · 10 <sup>3</sup>	50 · 10 <sup>3</sup>
Ambient temperature range	°C	-20...+60	-20...+60	-20...+60
Protection category		IP 20	IP 20	IP 20

**Approvals** (according to type)



80.61	80.82	80.91
		
<ul style="list-style-type: none"> <li>• Multi-voltage</li> <li>• Mono-function</li> </ul>	<ul style="list-style-type: none"> <li>• Multi-voltage</li> <li>• Mono-function</li> <li>• Transfer time can be regulated (0.05...1)s</li> </ul>	<ul style="list-style-type: none"> <li>• Multi-voltage</li> <li>• Mono-function</li> </ul>
<b>BI:</b> Power off-delay (True off-delay)	<b>SD:</b> Star-delta	<b>LI:</b> Asymmetrical flasher (starting pulse on) <b>LE:</b> Asymmetrical flasher (starting pulse on) with control signal
 <p>Wiring diagram (without control signal)</p>	 <p>Wiring diagram (without control signal)</p>	  <p>Wiring diagram (without control signal)</p> <p>Wiring diagram (with control signal)</p>

**Multi-function and multi-voltage**

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.51.0.240.0000  
Box clamp80.51.0.240.P000  
Push-in terminal

FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

**Contact specification**


Contact configuration		1 CO (SPDT)
Rated current/Maximum peak current	A	8/16
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2000
Rated load AC15 (230 V AC)	VA	400
Single phase motor rating (230 V AC)	kW	0.3
Breaking capacity DC1: 24/110/220 V	A	8/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)
Standard contact material		AgNi

**Supply specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1
Operating range	V AC	17...265
	V DC	17...265



**Technical data**

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1
Recovery time	ms	≤ 50
Minimum control impulse	ms	50
Setting accuracy-full range	%	± 5
Electrical life at rated load in AC1	cycles	100 · 10 <sup>3</sup>
Ambient temperature range	°C	-20...+60
Protection category		IP 20

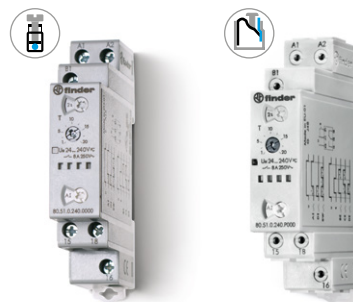**Approvals** (according to type)**80.51**

- Multi-voltage (24...240) V AC/DC
- Multi-function

- AI:** On-delay  
**DI:** Interval  
**SW:** Symmetrical flasher (starting pulse on)  
**BE:** Off-delay with control signal  
**CE:** On- and off-delay with control signal  
**DE:** Interval with control signal on

Wiring diagram  
(without control signal)Wiring diagram  
(with control signal)

**Multi-function and multi-voltage solid-state output timer**

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- Multi-voltage output (24...240 V AC/DC), independent from the input voltage
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- Multi-voltage input with "PWM clever" technology

80.71  
Box clamp




80.71




- Multi-voltage
- Multi-function

- AI:** On-delay  
**DI:** Interval  
**SW:** Symmetrical flasher (starting pulse on)  
**BE:** Off-delay with control signal  
**CE:** On- and off-delay with control signal  
**DE:** Interval with control signal on



Wiring diagram  
(without control signal)



Wiring diagram  
(with control signal)

For outline drawing see page 9

**Output circuit**

Contact configuration	1 NO (SPST-NO)	
Rated current	A	1
Rated voltage	V AC/DC	24...240
Switching voltage range	V AC/DC	19...265
Rated load AC15	A	1
Rated load DC1	A	1
Minimum switching current	mA	0.5
Max. "OFF-state" leakage current	mA	0.05
Max. "ON-state" voltage drop	V	2.8

**Input circuit**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power	VA (50 Hz)/W	1.3/1.3
Operating range	V AC	19...265
	V DC	19...265

**Technical data**

Specified time range	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h	
Repeatability	%	± 1
Recovery time	ms	100
Minimum control impulse	ms	50
Setting accuracy-full range	%	± 5
Electrical life	cycles	100 · 10 <sup>6</sup>
Ambient temperature range	°C	-20...+50
Protection category	IP 20	

**Approvals** (according to type)



## Ordering information

Example: 80 series, modular timers, 1 CO (SPDT) - 16 A, supply rated at (12...240)V AC/DC.

8 0 . 0 1 . 0 . 2 4 0 . 0 0 0 0

## Series

## Type

0 = Multi-function (AI, DI, SW, BE, CE, DE)  
 0 = Multi-function (AI, DI, LI, BE, CEB, DE, LE)  
     only for 80.01 NFC  
 1 = On-delay (AI)  
 2 = Interval (DI)  
 4 = Off-delay with control signal (BE)  
 5 = Multi-function (AI, DI, SW, BE, CE, DE)  
 6 = Power off-delay (True off-delay) (BI)  
 7 = Multi-function with solid state output  
     (AI, DI, SW, BE, CE, DE)  
 8 = Star-delta (SD)  
 9 = Asymmetrical flasher (LI, LE)

## Versions

0 = Standard  
 N = NFC (only for 80.01 NFC)  
 P = Push-in (only for 80.51.0.240.P000)

## Supply voltage

240 = (12...240)V AC/DC (80.01, 80.01 NFC, 80.91)  
 240 = (24...240)V AC/DC  
     (80.11, 80.21, 80.41, 80.51, 80.71, 80.82)  
 240 = (24...240)V AC, (24...220)V DC (80.61)

## Supply version

0 = AC (50/60 Hz)/DC

## No. of poles

1 = 1 CO (SPDT)  
 1 = 1 NO (SPST-NO), type 80.71 only  
 2 = 2 NO (DPST-NO), type 80.82 only

## Technical data

## Insulation


Dielectric strength			80.01/80.01 NFC/11/21/41/51/82/91	80.61	80.71
	between input and output circuit	V AC	4000	2500	2500
	between open contacts	V AC	1000	1000	—
Insulation (1.2/50 µs) between input and output			kV	6	4

## EMC specifications

Type of test		Reference standard	80.01/ 80.01 NFC/11/21/41/61/71/91	80.51/82
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	4 kV
	air discharge	EN 61000-4-2	8 kV	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)		EN 61000-4-3	10 V/m	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	4 kV	4 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV	4 kV
	differential mode	EN 61000-4-5	4 kV	4 kV
	on start terminal (B1) common mode	EN 61000-4-5	4 kV	4 kV
	differential mode	EN 61000-4-5	4 kV	4 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V	10 V
Magnetic field immunity		EN 61000-4-8	40 A/m	—
Radiated and conducted emission		EN 55011	class B	class A

## Other data


Current absorption on signal control (B1)		< 1 mA
Power lost to the environment	without contact current	W 1.4
	with rated current	W 3.2

Terminals		Box clamp	Push-in terminals (only for 80.51.0.240.P000)	
Wire strip length	mm	8	10	
 Screw torque	Nm	0.8	—	
Max. wire size		solid cable	solid cable	stranded cable
	mm²	1 x 4 / 2 x 2.5	1 x 2.5 / 2 x 2.5	1 x 2.5 / 2 x 2.5
	AWG	1 x 12 / 2 x 14	1 x 14 / 2 x 14	1 x 14 / 2 x 14




## Outline drawings


Types  
80.01/80.51  
Box clamp

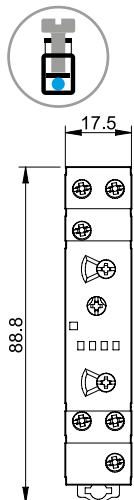


Types  
80.11/80.21/80.61  
Box clamp




Type 80.41  
Box clamp

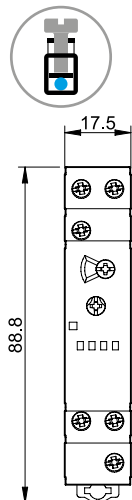



Type 80.91  
Box clamp

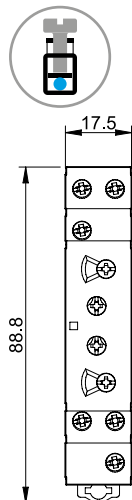


Type 80.71  
Box clamp

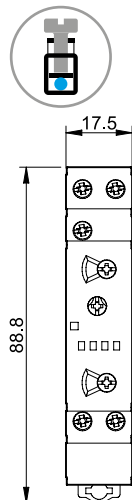

Type 80.82  
Box clamp

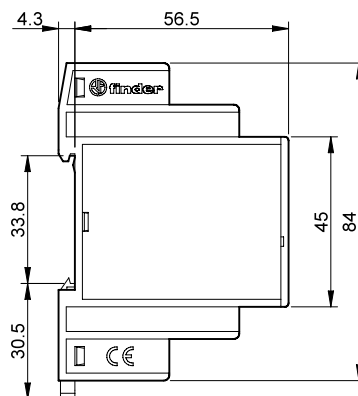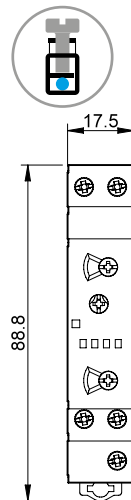


Type 80.51.0.240.P000  
Push-in terminal

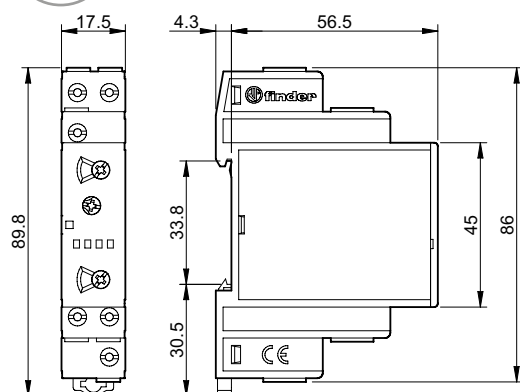


## Times scales


80 Series rotary switch positions




(0.1...2)s




(1...20)s




(0.1...2)min



(1...20)min



(0.1...2)h




(1...24)h



**Note:** 80.01 NFC time scale settings are via the Finder Toolbox app (for Android and iOS)

## Accessories



060.48

**Sheet of marker tags (CEMBRE Thermal transfer printers)** for relays types  
80.01/80.01 NFC/11/21/41/51/61/71 (48 tags), 6 x 12 mm

060.48

## LED

LED	Supply voltage	NO output contact	Contacts	
			Open	Closed
	OFF	Open	15 - 18	15 - 16
	ON	Open	15 - 18	15 - 16
	ON	Open (Timing in Progress)	15 - 18	15 - 16
	ON	Closed	15 - 16	15 - 18

- 80.01 NFC: the led will flicker fast for 3 seconds to confirm that program has been transferred correctly (only with timer powered).

- 80.61: The LED is illuminated only when the supply voltage is applied to the timer; during the timing period the LED is not illuminated.

## Functions

Without control signal = Start via contact in supply line (A1).

With control signal = Start via contact into control terminal (B1).



## Wiring diagram

U = Supply voltage

S = Signal switch


= Output contact

Without control signal

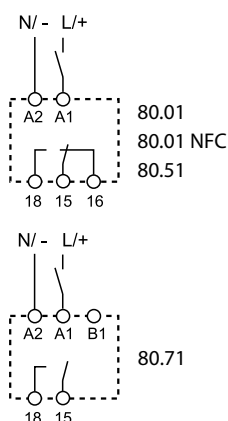


**(AI) ON-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.




**(DI) Interval.**

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.



**(SW) Symmetrical flasher (starting pulse ON) - only for 80.01, 80.51 and 80.71.**



Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).



**(LI) Asymmetrical flasher (starting pulse ON) - only for 80.01 NFC.**


Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ON (T1) and OFF (T2) user-settable.

With control signal

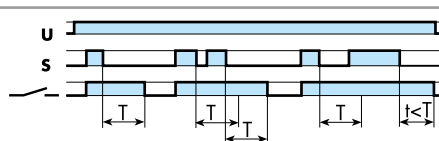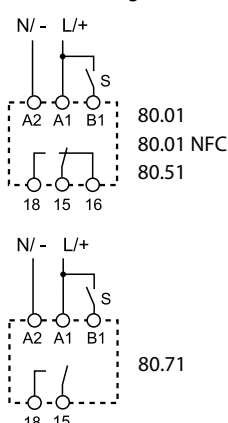


**(BE) OFF-delay with control signal.**

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

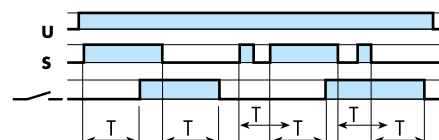


**(CE) ON- and OFF-delay with control signal - only for 80.01, 80.51 and 80.71.**

Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.

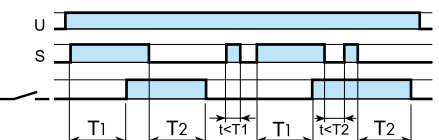

**(CEb) ON and OFF independent delays with control signal - only 80.01 NFC.**

Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay T1, after which the output contact transfers. Opening the Signal switch initiates the preset delay T2, after which the output contact resets.

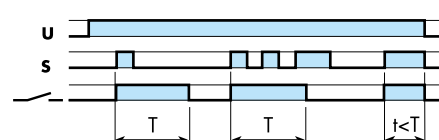

**(DE) Interval with control signal ON.**

Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

**NOTE: The function must be set before energising the timer.**

## Functions


### Wiring diagram

U = Supply voltage

S = Signal switch

= Output contact


Without control signal



80.11


80.21

80.61




80.82

With control signal




80.41

Without control signal




80.91

With control signal




80.91

80.01 NFC



**(AI) ON-delay.**

Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.




**(DI) Interval.**

Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.




**(BI) Power OFF-delay (True OFF-delay).**

Apply power to timer (minimum 500 ms). Output contacts transfer immediately. Removal of power initiates the preset delay, after which time the output contacts reset.

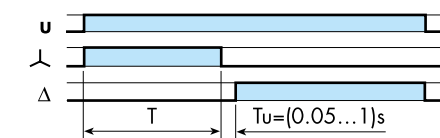


**(SD) Star-delta.**

Apply power to timer. The star contact (λ) closes immediately. After preset delay has elapsed the star contact (λ) resets. After a further transfer time variable from (0.05...1)s the delta contact (Δ) closes and remains in that position, until reset on power off.

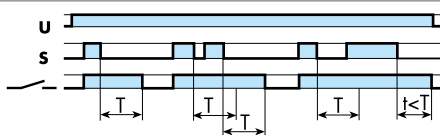


**(BE) OFF-delay with control signal.**

Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.



**(LI) Asymmetrical flasher (starting pulse ON).**


Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ON (T<sub>1</sub>) and OFF (T<sub>2</sub>) times are independently adjustable.

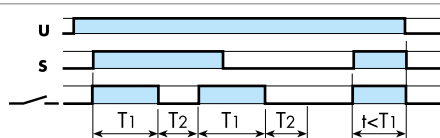


**(LE) Asymmetrical flasher (starting pulse ON) with control signal**

Power is permanently applied to the timer. Closing Signal Switch (S) causes the output contacts to transfer immediately and cycle between ON (T<sub>1</sub>) and OFF (T<sub>2</sub>), until opened.


**NOTE: The function must be set before energising the timer.**



• Possible to control an external load, such as another relay coil or timer, connected to the control signal terminal B1.



\* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1).



\*\* A voltage other than the supply voltage can be applied to the command Start (B1), example:

A1 - A2 = 230 V AC

B1 - A2 = 12 V DC

