

REPORT

1C Series



finder[®]
SWITCH TO THE FUTURE


Chronothermostat Chrono Touch Slide

Type 1C.61

**The ideal temperature,
within easy reach.**

Excellent character readability
Simple programming with wizard
Compact contemporary design,
with slider protective cover.

External temperature sensor.
Optional accessory to measure
and/or control to a temperature
remote from the chronothermostat.

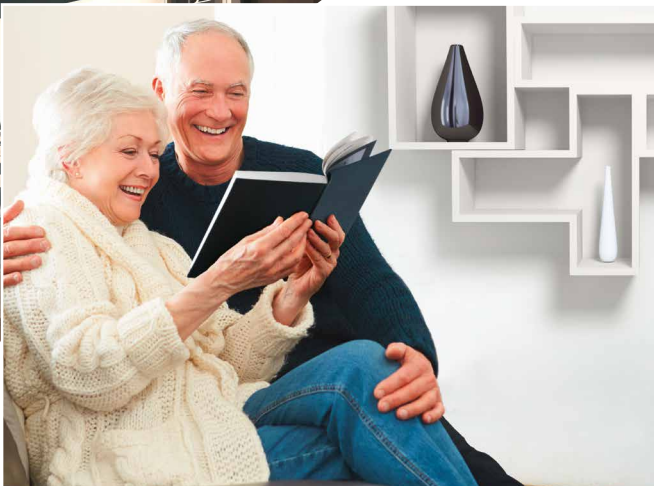

INTUITIVE: Guided programming
IMMEDIATE: Set and visualize by sliders
EASY: Only a few keys

Features

- Chronothermostat "touch slide" with weekly function
- Display with ultra white LED backlighting
- Temperature setting range from 5 to 37°C
- Alkaline batteries and mounting kit included
- Output contact rated 5 A - 250 V
- Switching hysteresis adjustable from 0.1 to 0.9 °C



Large display
LED backlit



Touch screen
technology



Partial or Full
lock with
PIN code




Time setting
to nearest
15 minutes




Control/override
by remote
contact



Heating or
cooling control



Display & configure
(optional) external
temperature sensor




Wide
temperature
setting range



Manual or
Auto modes



Frost protection
programmable
from 2 to 8 °C



2 batteries 1.5 V
(supplied)



Easy, intuitive
guided
programming



Audible
confirmation
of Key action



Recalibration
of displayed
temperature




For radiators,
convectors and
under-floor heating



Automatic
changeover of
Daylight Saving Time




Manual Timed
Override
function



Ultra-slim design
(only 17 mm
thick)

EASY and PRACTICAL USE taken to the highest level

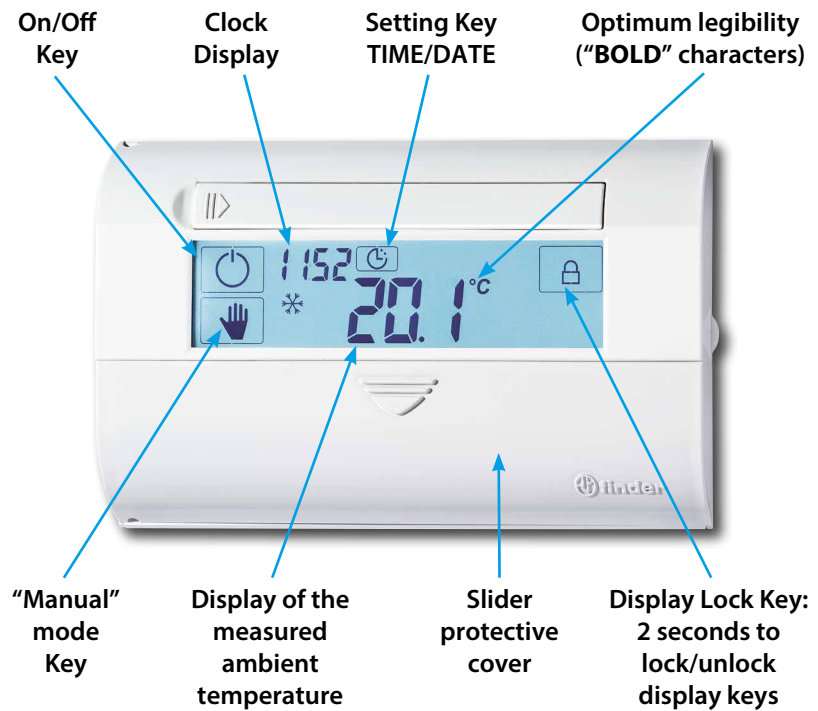

The 1C.61 Chronothermostat is available in two colours:

- White RAL 9010

code: 1C.61.9003.0101

- Metallic anthracite

code: 1C.61.9003.2101

Accessory - External temperature sensor - Type 01C.61



Sensing range	(-20...+90)°C
Resolution	0.1 °C (-9.9...+90)°C 1 °C (-10...-20)°C
Maximum cable length	20 m
Degree of protection	IP 54