






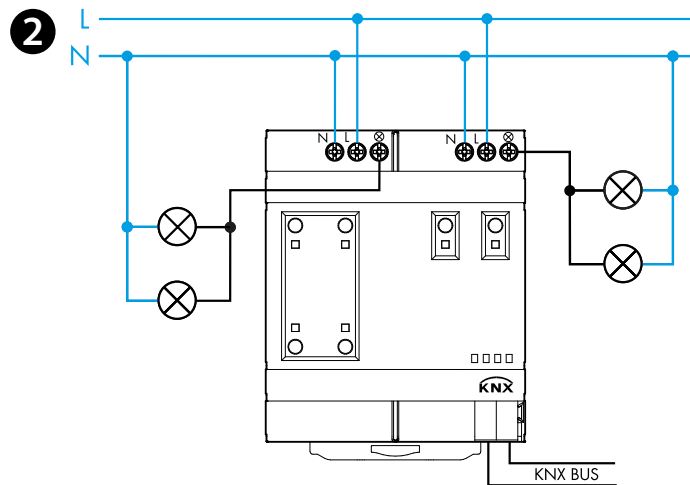
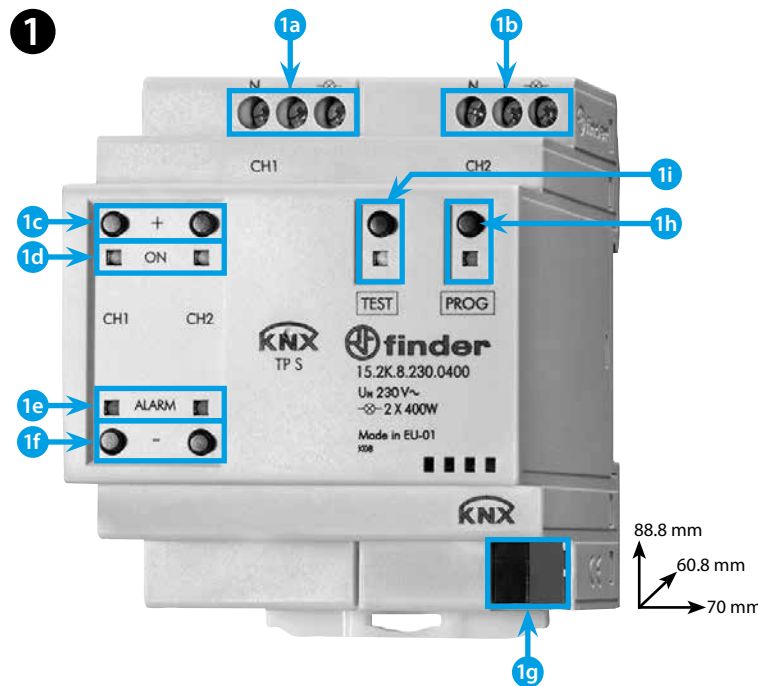
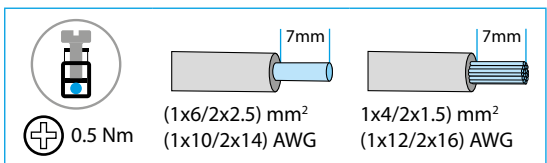




15.2K

15.2K.8.230.0400	
IN	BUS KNX 29 V DC (21...32 V DC) SELV
P_{max}	2 x 400 W max
CH1 	LED (230 V AC) 100 W
	 (230 V AC) 400 W
	 (230 V AC) 400 W
	 (230 V AC) 100 W
CH2 	 (230 V AC) 400 W
	(-5...+45)°C
IP20	



ENGLISH

15.2K DIMMER KNX (2 channels)

1 FRONT VIEW

- 1a Channel 1 (CH 1)
- 1b Channel 2 (CH 2)
- 1c Button for manual increase
- 1d Green LED, output ON
- 1e Red LED, overload
- 1f Buttons for manual decrease
- 1g Power supply via KNX BUS
- 1h PROG: press the button to enter programming mode (Red LED ON)
- 1i TEST: test button. Press the button for 3 seconds (yellow LED flashes) to enable the 1C / 1F outputs keyboard. To disable it, press the button once (yellow LED OFF). After enabling the manual function with the TEST key, with the UP(+)/DOWN(-) keys of the individual channels it is possible to switch on the lights in steps of 30%. During the TEST mode, the command telegrams from the bus are ignored

2 WIRING DIAGRAM

PRODUCT FEATURES

- Leading Edge or Trail Edge adjustment method settable by ETS 4
- Manual control of each channel via front panel
- Thermal protection and short circuit protection
- Scenario management
- ID LED for each output

NOTE

- The product must not be used for safety functions
- Environmental class according to EN 50491-2: Protected by climate in uncontrolled conditions, temperature -25...+45°C
- Check the correct address of the device and the setting of the parameters, via ETS software
- EN 60669-1 and 60669-2-1/EN 50491
- 35 mm bar mounting (EN60715)
- Width 70 mm (4 modules)

CAUTION

The individual dimmer channels and the BCU are supplied separately, in case of non-simultaneous power supply an initialization time which can last up to 20" is required. During this phase, the commands received will not be considered.