


# Electronic staircase timers 10 - 16 A



Prices, features, specifications, capabilities, appearance and availability of our products and services are subject to change without notice. FINDER assumes no responsibility for the presence of possible errors or insufficient information in this document. In case of discrepancies between the printed and online versions, the latter prevails.

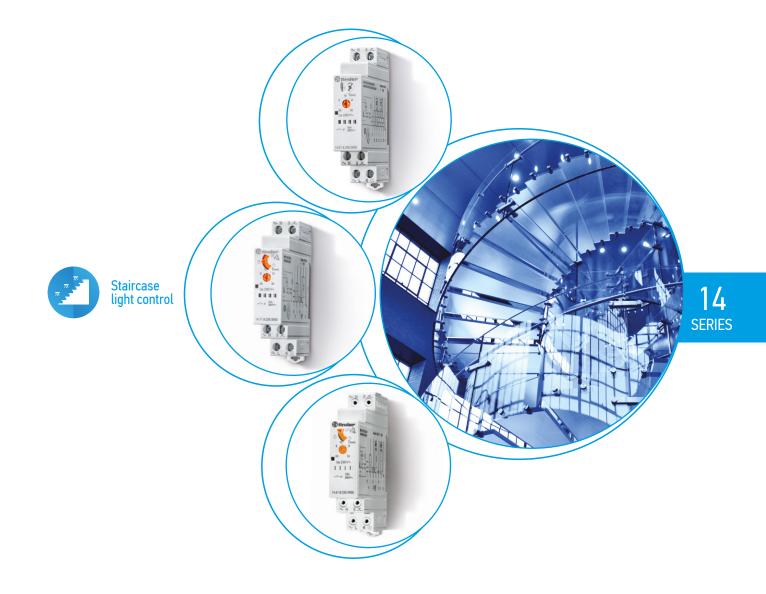

14 SERIES

	14.01	
Multi-function electronic staircase timers	14.01	14.11
<ul> <li>Time setting from 30 seconds to 20 minutes</li> <li>"Zero crossing" load switching</li> </ul>	6 6	
• Suitable for 3 or 4 wire systems, with automatic	Dinder stage wa	® finder
recognition		
Compatible with movement detectors 18 series		
<ul> <li>- (only 14.01 with Staircase timer function)</li> <li>• LED status indicators</li> </ul>		~~ 题~ 图 (()))
Cadmium free contact material		14.11.8.230.0000
Can be used with illuminated push - buttons		<b>6</b> 6 (1)
• "Blade + cross" - both flat blade and cross		-
head screw drivers can be used to adjust the		
function selector, the timing trimmer, and to	<ul> <li>8 functions:</li> <li>Staircase timer</li> </ul>	<ul> <li>for centralised switch off</li> <li>4 functions:</li> </ul>
disengage the 35 mm rail mounting clip • 35 mm rail (EN 60715) mount	- Staircase timer +	- Step relay
	maintenance function	- Timing Step relay
14.01/14.11	- Staircase timer with early	- Staircase timer
Box clamp	warning	- Light ON
	- Staircase timer with early	
	warning + maintenance function	
	- Timing step relay	
	- Timing step relay with early	
	warning	
	- Step relay - Light ON	
For outline drawing see page 14		
Contact specification		
Contact configuration	1 NO (SPST-NO)	1 NO (SPST-NO)
Rated current/Maximum peak current A	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage V AC	230/—	250/400
Rated load AC1 VA	3700	4000
Rated load AC15 (230 V AC) VA	750	750
Nominal lamp rating:		
230 V incandescent/halogen W	3000	3000
fluorescent tubes with electronic ballast W	1500	1500
fluorescent tubes with		
electromagnetic ballast WCFL W	1000	1000
230 V LED W	600	600 600
LV halogen or LED with	000	000
electronic ballast W	600	600
LV halogen or LED with	1500	1500
electromagnetic ballast W Minimum switching load mW (V/mA)	1500	1500 1000 (10/10)
Standard contact material	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Supply specification	J 2	
Nominal voltage (U <sub>N</sub> ) V AC (50/60 Hz)	230	110240
V DC	_	_
Rated power VA (50 Hz)/W	3/1.2	3.2/1
Operating range AC (50 Hz)	(0.81.1)U <sub>N</sub>	(90264)U <sub>N</sub>
DC		_
Reset time (s)	—	3
Technical dataElectrical life at rated load in AC1cycles	100 · 10 <sup>3</sup>	100 · 10 <sup>3</sup>
Delay setting min	0.520	0.520
Max no. of illuminated push-button ( $\leq 1$ mA)	30	45
Maximum impulse duration	Continuous	Continuous
Dielectric strength between: open contacts V AC	1000	1000
supply - contacts V AC	_	2000
Ambient temperature range °C	-10+60	-10+60
Protection category	IP 20	IP 20
Approvals (according to type)	CE 25 EAE @	<b>CE</b> K EAE



Multi-function electronic staircase timers <ul> <li>Year Setting from 30 seconds to 20 minutes</li> <li>Suitable for 3 or 4 wire systems, with automatic recognition</li> <li>Compatible with movement detectors 18 series         <ul> <li>(only with Staircase timer function)</li> <li>"Zero crossing" load switching</li> <li>Cadmium free contact material</li> <li>Can be used with illuminated push - buttons</li> <li>"Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the function selector, the timing trimmer, and to disengage the 35 mm rail mounting clip</li> <li>35 mm rail (EN 60715) mount</li> </ul> </li> <li>14.61         <ul> <li>Push-in terminal</li> <li>Box clamp</li> <li>Cathe drawing see page 14</li> </ul> </li> </ul>	<ul> <li>14.61</li> &lt;</ul>	<ul> <li>14.71</li> <li>Image: Arrow of the second second</li></ul>
Contact specification		
Contact configuration	1 NO (SPST-NO)	1 NO (SPST-NO)
Rated current/Maximum peak current A	10 /—	16/30 (120 A - 5 ms)
Rated voltage/ Maximum switching voltage V AC	230/—	230/—
Rated load AC1 VA	2300	3700
Rated load AC15 (230 V AC) VA	450	750
Nominal lamp rating:		
230 V incandescent/halogen W	1000	3000
fluorescent tubes with		
electronic ballast W	1500	1500
fluorescent tubes with	500	
electromagnetic ballast W	500	1000
230 V LED W	300	600 600
LV halogen or LED with	500	000
electronic ballast W	600	600
LV halogen or LED with		
electromagnetic ballast W	1500	1500
Minimum switching load mW (V/mA)	1000 (10/10)	1000 (10/10)
Standard contact material	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>
Supply specification		
Nominal voltage (U <sub>N</sub> ) V AC (50/60 Hz)	230	230
V DC	_	_
Rated power VA (50 Hz)/W	3/1.2	3/1.2
Operating range AC (50 Hz)	(0.81.1)U <sub>N</sub>	(0.81.1)U <sub>N</sub>
DC	—	—
Technical data	100, 103	100 103
Electrical life at rated load in AC1 cycles	100 · 10 <sup>3</sup> 0.520	100 · 10 <sup>3</sup> 0.520
$\frac{\text{Delay setting}}{\text{Max no. of illuminated push-button ($\leq 1 mA$)}}$	30	30
Max no. of illuminated push-button ( $\leq$ 1 mA) Maximum impulse duration	Continuous	Continuous
Dielectric strength between: open contacts V AC	1000	1000
supply - contacts V AC		
Ambient temperature range °C		-10+60
Protection category	IP 20	IP 20
Approvals (according to type)	CE 器 EAE	C€ ヒム [A[ @



<ul> <li>Mono-function electronic staircase timers</li> <li>Time setting from 30 seconds to 20 minutes</li> <li>"Zero crossing" load switching</li> <li>Wiring compatible with mechanical versions and with old type (low emission) illuminated push-buttons (14.91)</li> <li>Suitable for 3 or 4 wire systems, via "push-button configuration" (14.81)</li> <li>110125 V AC supply version available (14.81)</li> <li>All terminal on same side</li> <li>Cadmium free contact material</li> <li>Can be used with illuminated push - buttons</li> <li>"Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the function selector, the timing trimmer, and to disengage the 35 mm rail mounting clip</li> <li>35 mm rail (EN 60715) mount</li> </ul>	14.81         Image: Constraint of the second seco	<text></text>	
For outline drawing see page 14 Contact specification Contact configuration	1 NO (SPST-NO)	1 NO (SPST-NO)	
Rated current/Maximum peak current A	16/30 (120 A - 5 ms)	16/30 (120 A - 5 ms)	
Rated voltage/	222 (	222 (	
Maximum switching voltage V AC Rated load AC1 VA	230/—	230/—	
	3700	3700	
Rated load AC15 (230 V AC) VA	750	750	
Nominal lamp rating:			
230 V incandescent/halogen W	3000	3000	
fluorescent tubes with	1500	1500	
electronic ballast W fluorescent tubes with	1500	1500	
electromagnetic ballast W	1000	1000	
CFL W	600	600	
230 V LED W	600	600	
LV halogen or LED with	000	000	
electronic ballast W	600	600	
LV halogen or LED with			
electromagnetic ballast W	1500	1500	
Minimum switching load mW (V/mA)	1000 (10/10)	1000 (10/10)	
Standard contact material	AgSnO <sub>2</sub>	AgSnO <sub>2</sub>	
Supply specification			
Nominal voltage ( $U_N$ ) V AC (50/60 Hz)	110125/230	230	
V DC	_	_	
Rated power VA (50 Hz)/W	3/1.2	3/1.2	
Operating range AC (50 Hz)	(0.81.1)U <sub>N</sub>	(0.81.1)U <sub>N</sub>	
DC			
Technical data			
Electrical life at rated load in AC1 cycles	100 · 10 <sup>3</sup>	100 · 10 <sup>3</sup>	
Delay setting min	0.520	0.520	
	45 25		
Maximum impulse duration	Continuous	Continuous	
Ambient temperature range °C	-10+60	-10+60	
Max no. of illuminated push-button (≤ 1 mA)         Maximum impulse duration         Ambient temperature range       °C         Protection category	IP 20	IP 20	
ů,	CE 25 [AL @	CE K ERI	
Approvals (according to type)		CC CA [IIL	




## **Ordering information**

14

SERIES



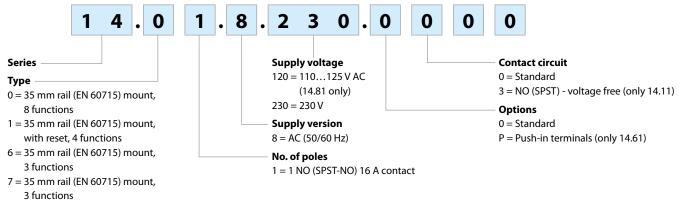


- 8 = 35 mm rail (EN 60715) mount, mono-function, all terminals on same side
- 9 = 35 mm rail (EN 60715) mount, mono-function, 3 terminals

## **Technical data**

Insulation				
Dielectric strength between open contacts VAC		AC 1	1000	
Other data				
Power lost to the environment				
	without contact current	W 1	1.2	
	with rated current	W 2	2	
Maximum cable length for push-button connection m		m 2	200	
Terminals		В	Box clamp	Push-in terminal
Wire strip length	n	nm   1	10	10
🕀 Screw torque	٩	lm 0	).8	_
Min. wire size		S	solid cable	solid cable
	m	m² 0	).5	0.75
	AV	VG 2	20	18
Max. wire size		S	solid cable	solid cable
	m	m² 1	l x 6 / 2 x 4	1 x 2.5 / 2 x 2.5
	AV	VG 1	l x 10 / 2 x 12	1 x 14 / 2 x 14
Min. wire size		s	stranded cable	stranded cable
	m	m² 0	).5	0.75
	AV	VG 2	20	18
Max. wire size		s	stranded cable	stranded cable
	m	m² 1	l x 4 / 2 x 2.5	1 x 2.5 / 2 x 2.5
	AV	VG 1	l x 12 / 2 x 14	1 x 14 / 2 x 14

## Zero crossing switching



- 1 Lower inrush current protects and increases lamp life
- 2 Lower inrush current reduces the possibility of contact welding
- 3 The current at switch-off is also lower, reducing stress and wear on the contacts

Note

Using the type 14.91, the lamps are switched on directly by the push-button




14


SERIES

## Wiring diagrams


Red LED indication: (with power supply) Continuous = relay ON; Blinking = relay OFF

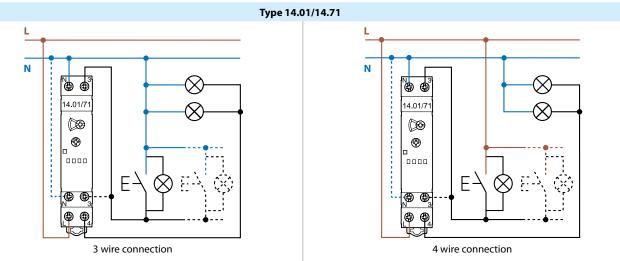


**Type 14.01, 14.61 or 14.71** Without Staircase maintenance function, triggered by PIR movement detector (18 series).

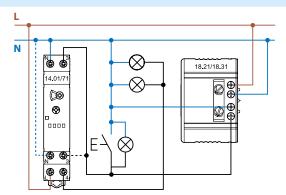

3 wire connection (with 18.21.8.230.0300 or 18.31.8.230.0300 only)

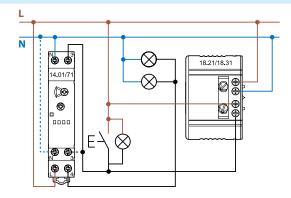



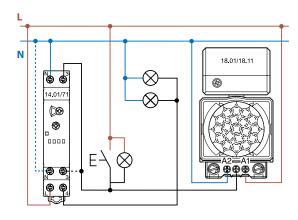


4 wire connection (with 18.01.8.230.0000 or 18.11.8.230.0000 only)






## Wiring diagrams

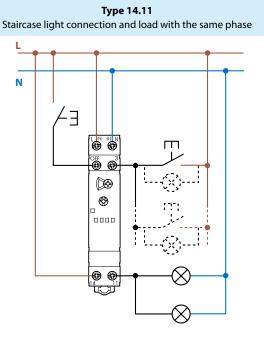

Type 14.11 Staircase light connection and load with different phases L1 L2 Ν L1 F L1 ۲ Ð Ø ۲ L2 ਇਸ਼ਿ

**Note:** If the load is powered by a phase other than the one that powers staircase light 14.11, a 50% reduction in the nominal lamp load must be applied.

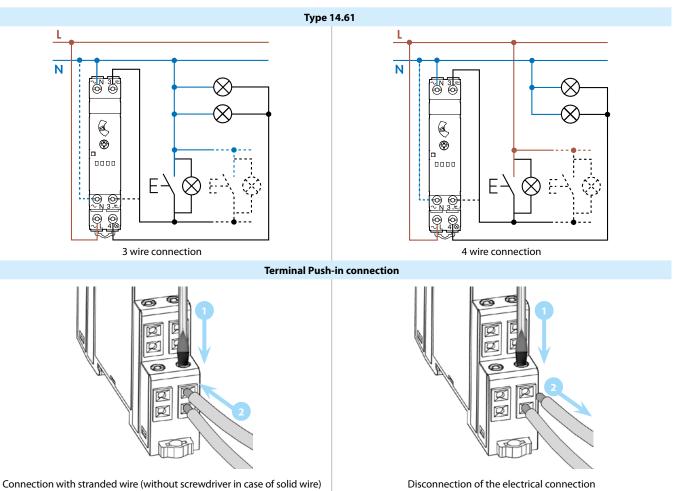


ll-2025, www.findernet.com




14 SERIES

## Wiring diagrams

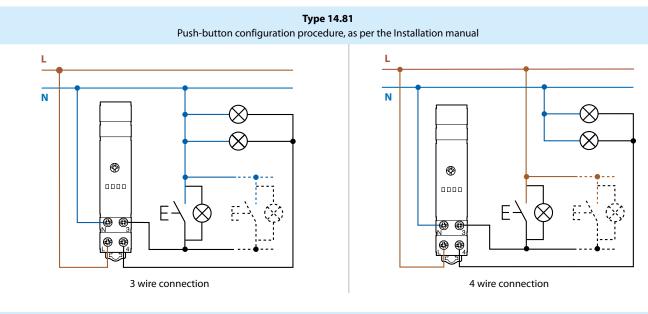

**Type 14.91** The push-buttons must be rated for the load current

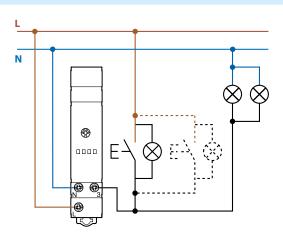

9




## **Functions**

14

SERIES


#### Type 14.01 Functions selectable with front rotary selector

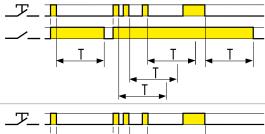

#### (BE) Staircase timer


On initial impulse the output contact closes and timing starts for the pre-set duration; subsequent impulses during the timing period will extend the timing period by the full pre-set value.


On expiry of the time delay, the output contact opens.



#### (ME) Staircase timer + Staircase maintenance (BE) + 🔥 )

In addition to the Staircase timer function (BE), an impulse of  $\geq$  5 seconds will close the output contact for 60 minutes, after which time the contact will open. Ideal for maintenance or cleaning activities. The 60 minute timing can be interrupted by a further impulse of  $\geq$  5 seconds, and the output contact then opens






#### (BP) Staircase timer with early warning


On initial impulse the output contact closes and the timing starts for the pre-set duration. After the timing period, the output contact blinks off once; 10secs later the contact blinks off twice, and after a further 10secs the contact opens.

During the pre-set and 20 second warning time, it is possible, by a further impulse, to extend the time by the full pre-set value.



#### (MP) Staircase timer with early warning + Staircase maintenance ( BP + 🔥 )

In addition to the Staircase timer function (BP), an impulse of  $\geq$  5 seconds will close the output contact for 60 minutes, after which time the contact will open. Ideal for maintenance or cleaning activities. The 60 minute timing can be interrupted by a further impulse of  $\geq$  5 seconds, and the output contact then opens

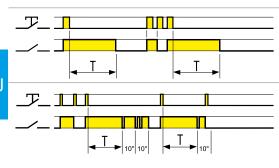

#### (IT) Timing step relay


On initial impulse the output contact closes and timing starts for the pre-set duration; On expiry of the time delay, the output contact opens.

During the timing period it is possible to immediately open the contact with a further impulse.

#### (IP) Timing step relay with early warning

On initial impulse the output contact closes and timing starts for the pre-set duration; After the timing period, the output contact blinks off once; 10 secs later the contact blinks off twice, and after a further 10 secs the contact opens.

During the pre-set and 20 second warning time, it is possible to immediately open the output contact by a further impulse.



#### (RI) Step relay

After every impulse, the output contact changes state - alternately switching from open to closed and vice versa.

#### 🛱 Light ON

With this function set - the output contact stays permanently closed.

NOTE: The blinking within the Early Warning functions (BP and IP) could cause re-start problems for fluorescent lamps with electromagnetic chokes (both conventional and compact types); We consequently suggest not to use such lamps with these functions.



14


CEDIE



3 **\_7\_**\_\_

OFF \_\_\_\_\_

#### Type 14.11 Functions selectable with front rotary selector

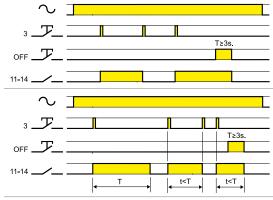


#### (RI) Step relay

The device works like a classic step relay: the output changes state each time push-button (3) is pressed. Pressing OFF for more than 3 seconds forces the output to the off state.

#### (IT) Timing step relay

On initial impulse the output contact closes and timing starts for the pre-set duration; On expiry of the time delay, the output contact opens.

During the timing period it is possible to immediately open the contact with a further impulse. Pressing OFF for more than 3 seconds forces the output to the off state.

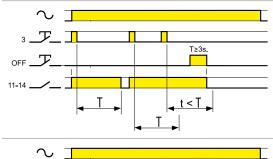

T≥3s

#### (BE) Staircase timer

On initial impulse the output contact closes and timing starts for the pre-set duration; subsequent impulses during the timing period will extend the timing period by the full pre-set value.

On expiry of the time delay, the output contact opens.

Pressing OFF for more than 3 seconds forces the output to the off state.


## Light ON


With this function set - the output contact stays permanently closed.





## **Functions**

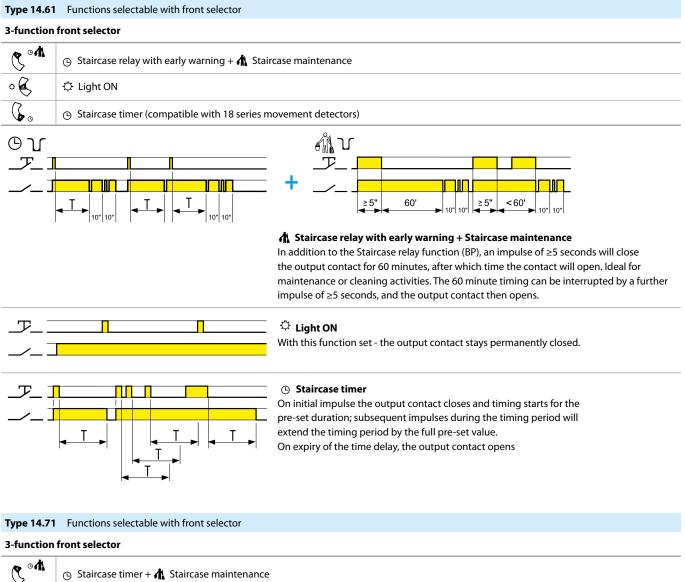







#### A Staircase maintenance

An impulse of  $\geq$  5 seconds will close the output contact for 60 minutes, after which time the contact will open. Ideal for maintenance or cleaning activities. The 60' timing can be interrupted by a further impulse of  $\geq$  5 seconds, the output contact opens.

With this function set - the output contact stays permanently closed.



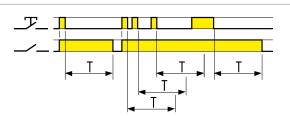

## Staircase timer

🗘 Light ON


On initial impulse the output contact closes and timing starts for the pre-set duration; subsequent impulses during the timing period will extend the timing period by the full pre-set value.

On expiry of the time delay, the output contact opens.






## Functions

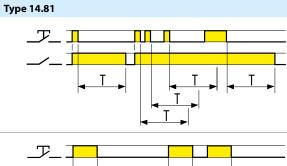

60'

≥5'




On expiry of the time delay, the output contact opens.

#### "Staircase maintenance" function

An impulse of  $\geq$  5 seconds will close the output contact for 60 minutes, after which time the contact will open. Ideal for maintenance or cleaning activities. The 60' timing can be interrupted by a further impulse of  $\geq$  5 seconds, which will re-establish the staircase timer function; so on expiry of the staircase time delay, the output contact opens.

On initial impulse the output contact closes and timing starts for the pre-set





≥5"

<60'

#### Signal ON pulse

Staircase timer

On initial impulse the output contact closes, and remain so for the duration of the preset delay. On expiry of the time delay, the output contact opens.





## **Accessories**

	Adaptor for panel mounting, 17.5 mm wide	020.01
020.01		
	Sheet of marker tags (CEMBRE Thermal transfer printers), plastic, 48 tags, 6 x 12 mm	060.48

060.48

## **Outline drawings**

