



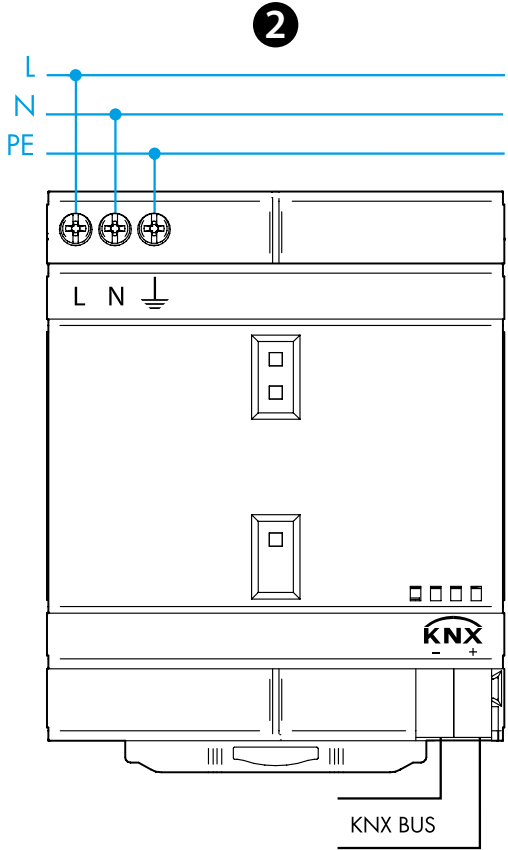

78.2K

78.2K.1.230.3000	
IN	230...240 V AC (50/60 Hz) U _{min} - U _{max} 185 - 260 V AC P (stand-by @230 V AC) 1.45 W
OUT	BUS KNX 30 V DC SELV (29...31 V DC) 640 mA
	(-5...+45)°C
IP20	

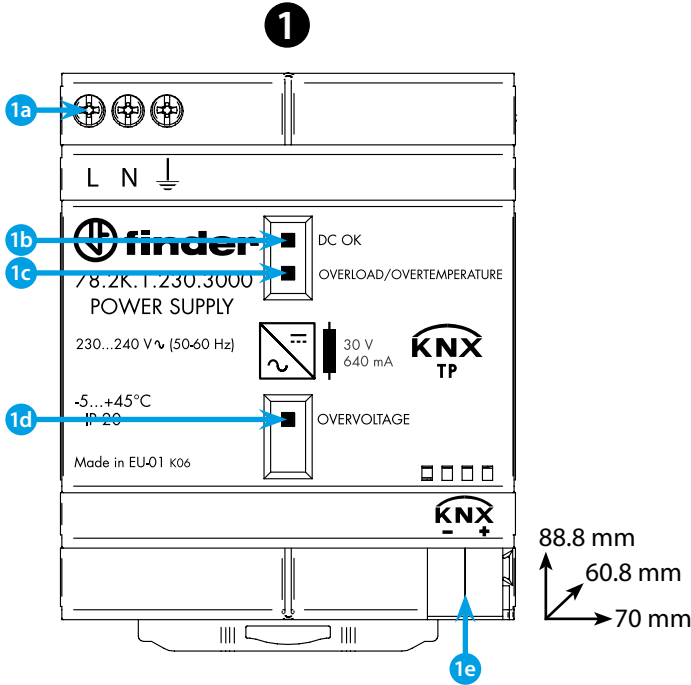

STATE		LED		OUT
CHECK START-UP	V _{OUT} OK	1b	1c OFF 1d OFF	ON
	V _{OUT} LOW < 29 V	1b	1c OFF 1d OFF	OFF
	V _{OUT} HIGH > 33 V	1b OFF 1c OFF	1d	OFF
NORMAL FUNCTION	V _{OUT} OK I _{OUT} ≥ 0.9 A	1b	1c	ON
	V _{OUT} < 29 V I _{OUT} ≥ 0.9 A	1b OFF 1c	1d OFF	ON
 ALARM CONDITION: T _{amb} > 45°C @ I _{nom} .	Pre-alarm: up to 60s	1b	1c	ON
	Latched alarm	1b OFF 1c	1d OFF	OFF

ITALIANO

78.2K.1.230.3000 ALIMENTATORE KNX 640 mA

1 QUADRO FRONTALE

- 1a Alimentazione
- 1b LED verde (DC OK)
- 1c LED rosso (sovraccarico/sovratemperatura)
- 1d LED giallo (sovratensione)
- 1e Uscita BUS KNX

2 SCHEMA DI COLLEGAMENTO

- NOTE**
- Il prodotto non deve essere utilizzato per funzioni di sicurezza
 - Classe ambientale secondo EN 50491-2: Protetto dal clima in condizioni non controllate, temperatura -5...+45°C
 - EN 63044-3 / EN 50491
 - Distanza minima tra alimentatori: 15 m
 - Montaggio verticale, su barra DIN

