



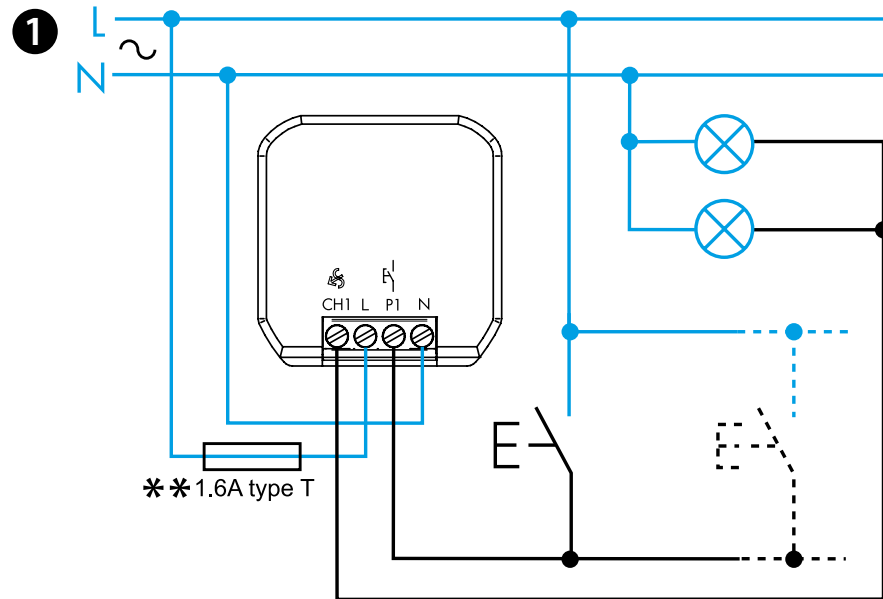

15.21

	15.21.8.230.B300 U _N 230 V AC (50/60 Hz) U _{min} 184 V AC U _{max} 253 V AC P 0.4 W	
	15.21.8.120.B200 U _N 110...120 V AC (50/60 Hz) U _{min} 88 V AC U _{max} 132 V AC P 0.4 W	
	15.21.8.230.B300	15.21.8.120.B200
	EN 60669-1 / EN 60669-2-1	
LEDi	150 W	100 W
	300 W	150 W
	300 W	150 W
CFLi	150 W	80 W
	300 W	150 W
	(-10...+50)°C	

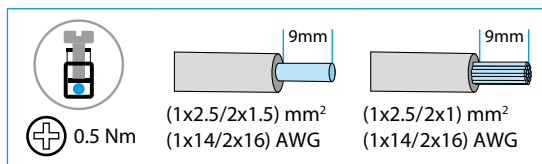


2

YOU
Finder YOU

Download on the App Store | GET IT ON Google Play

Bluetooth™

	A	B	C	D
LED		1* TE Trailing Edge		
		2 LE Leading Edge		
LED			3 TE Trailing Edge	
			4 LE Leading Edge	
			5 TE Trailing Edge	
			6 LE Leading Edge	
				7 LE Leading Edge
AUTO	AUTOMATIC			

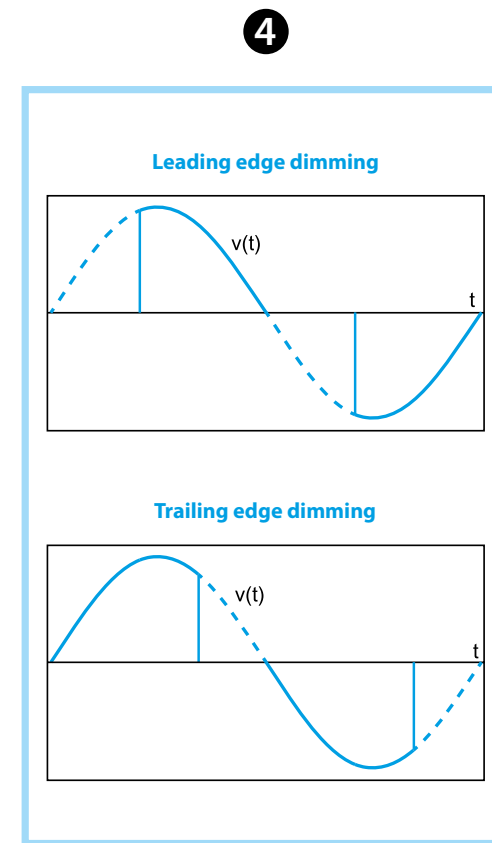

ENGLISH

15.21.8.230.B300 DIMMER BLUETOOTH

- 1 WIRING DIAGRAM**
- 2 FINDER YOU**
With the Finder YOU App you can:
- Set the desired function
 - Adjust the minimum dimming level (range 5% - 60%)
 - Adjust the ON/OFF transition time under short pulse command (0-3s)
 - Adjust the speed of dimming under long pulse command (1s-16s)
 - Set the Memory function
 - Set the Restore after Blackout function
 - Associate the wireless buttons
 - Set the scenario transition time (1s-4s)
- 3 FUNCTIONS**
- *1 factory pre-set function.
- A** Type of connected load:
- LED (functions 1, 2, 3, 4)
 - Halogen (functions 1, 2)
 - Electronic power supplies (functions 1, 2)
 - CFL (functions 5, 6)
 - Electromechanical power supplies (function 7)
- B** Selectable function
- C** Regulation method: Trailing Edge - Leading Edge (see point **4**)
- D** Regulation curve
(Linear: functions 1-2-7) (Exponential: functions 3-4-5-6)

- NOTE**
- ** Only for 15.21.8.230.B300
 - Without memory function: each ON command results in the full brightness level being established
 - With memory function: at switch OFF the brightness level is memorised and with the subsequent ON command this level is restored
 - Short pulse command: switches alternately between ON and OFF status
 - Long pulse command: the light level will increase or decrease progressively, either linearly or exponentially, depending on the function chosen
 - Transmission range: approximately 10 m in free space and without obstacles
 - The transmission range may vary depending on the building structure
- Example:
- Reinforced concrete walls and/or metal walls
 - Partition walls filled with insulating wool on a metallic backing
 - Ceilings with metal or carbon fiber panels
 - Lead glass or glass with metal cladding, steel furniture

NOTA
Electronic switches must be protected upstream by a circuit breaker with a maximum rated current of 6 A.
Other types of protection can be used.
These must have equivalent characteristics and comply with national regulations.