


**Features**

**Slim timed sockets for 34 series, 6.2 mm wide**

- Multi-function timer
- AC and DC supply
- 4 time scales from 0.1 s to 6h
- LED indicator

93.21  
Screw terminal

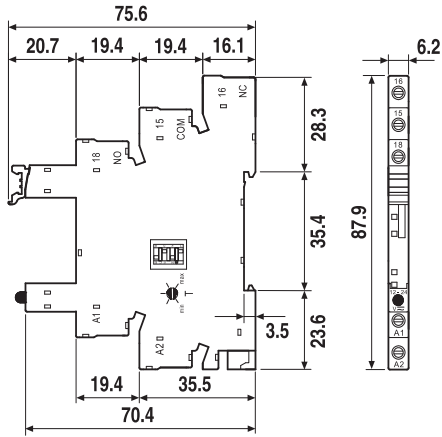


**NEW 93.21**



- Time scale: from 0.1 s to 6h
- Multi-function
- For use with 34.51 and 34.81 relays

**AI:** On-delay  
**DI:** Interval  
**GI:** Pulse (0.5 s) delayed  
**SW:** Symmetrical flasher (starting pulse on)

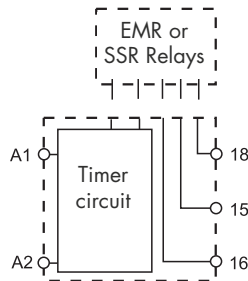

**Contact specification**

Contact configuration	
Rated current/Maximum peak current	A
Rated voltage/Maximum switching voltage V AC	
Rated load AC1	VA
Rated load AC15 (230 V AC)	VA
Single phase motor rating (230 V AC)	kW
Breaking capacity DC1: 30/110/220 V	A
Minimum switching load	mW (V/mA)
Standard contact material	

See 34.51 and 34.81 relays

**Supply specification**

Nominal voltage (U <sub>N</sub> )	V AC (50/60 Hz)	12...24
	V DC	12...24
Rated power AC/DC	VA/W	0.7/0.5
Operating range	V AC (50/60 Hz)	9.6...26.4
	DC	9.6...26.4

**Technical data**


Specified time range		(0.1...3)s, (3...60)s, (1...20)min, (0.3...6)h
Repeatability	%	± 1
Recovery time	ms	≤ 50
Setting accuracy full range	%	± 5
Electrical life at rated load in AC1	cycles	See 34.51 (EMR) and 34.81 (SSR) relays
Ambient temperature range	°C	-40...+70 (EMR) / -40...+55 (SSR)
Protection category		IP 20

**Approvals** (according to type)



### Ordering information

Example: type 93.21 multi-function timer module for 34 series relay, (12...24)V AC/DC supply voltage.

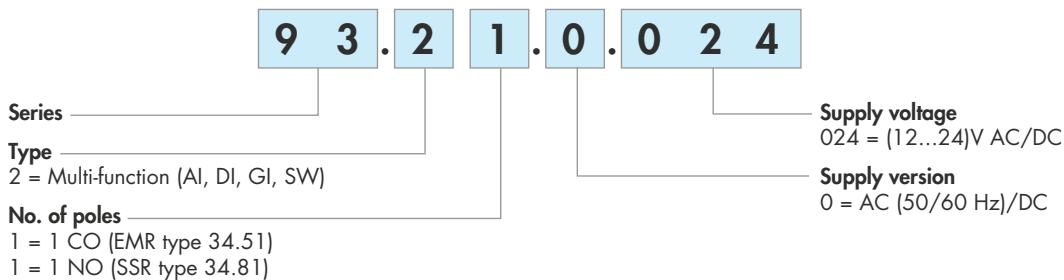

### Combinations

Output	Supply voltage	Type of relay	Type of socket
1 pole 6A, electromechanical relay	12 V AC/DC	34.51.7.012.0010	93.21.0.024
1 pole 6A, electromechanical relay	24 V AC/DC	34.51.7.024.0010	93.21.0.024
1 output 2A 24 V DC, solid state relay	24 V AC/DC	34.81.7.024.9024	93.21.0.024
1 output 2A 240 V AC, solid state relay	24 V AC/DC	34.81.7.024.8240	93.21.0.024

Note: Although the timer socket covers both 12 and 24 volt supplies, it must be combined with the appropriate 12 V or 24 V relay; resulting in a combination suitable for just a single supply voltage.

### Technical data


#### EMC specifications

Type of test	Reference standard		
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV
	air discharge	EN 61000-4-2	8 kV
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)		EN 61000-4-3	10 V/m
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals		EN 61000-4-4	2 kV
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	2 kV
	differential mode	EN 61000-4-5	1 kV
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals		EN 61000-4-6	10 V
Radiated and conducted emission		EN 55022	class B

#### Other data

		EMR	SSR
Power lost to the environment	without contact current	W	0.1
	with rated current	W	0.6
Wire strip length		mm	10
⊖ Screw torque		Nm	0.5
Max. wire size		solid cable	stranded cable
		mm <sup>2</sup>	1x2.5 / 2x1.5
		AWG	1x14 / 2x16


### Times scales

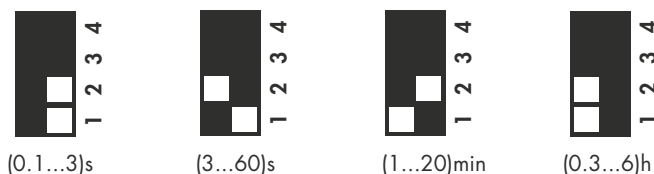

Functions

LED	Supply voltage	NO contact/output
	OFF	Open
	ON	Open (time in progress)
	ON	Closed

Wiring diagram




U = Supply voltage

= Output contact

		<p><b>(AI) On-delay</b> Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.</p>
		<p><b>(DI) Interval</b> Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.</p>
		<p><b>(GI) Pulse (0.5s) delayed</b> Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs after a fixed time of 0.5s.</p>
		<p><b>(SW) Symmetrical flasher (starting pulse on)</b> Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).</p>

Accessories



093.20

Approvals  
(according to type):




**20-way jumper link**

093.20 (blue)

Rated values

36 A - 250 V

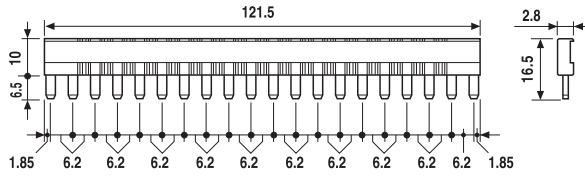

093.01


**Plastic separator**

093.01

Thickness 2 mm, required at the start and the end of a group of interfaces.

Can be used for visual separation group, must be used for:

- protective separation of different voltages of neighbouring PLC interfaces according to VDE 0106-101
- protection of cut jumper links



093.64

**Sheet of marker tags, plastic, 64 tags, 6x10 mm**

093.64