

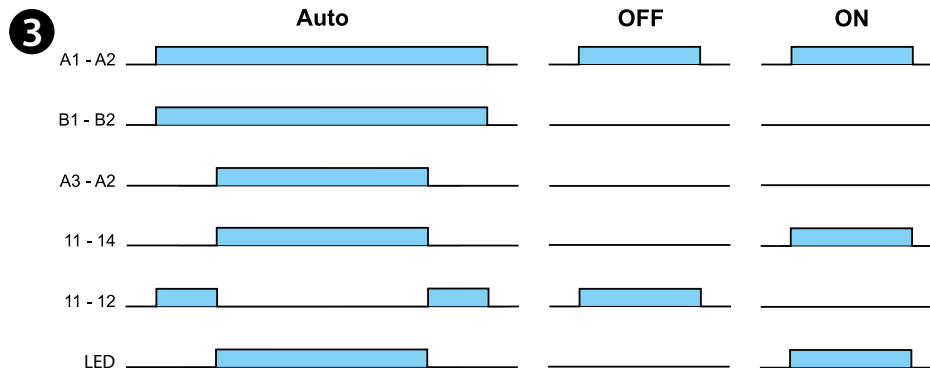


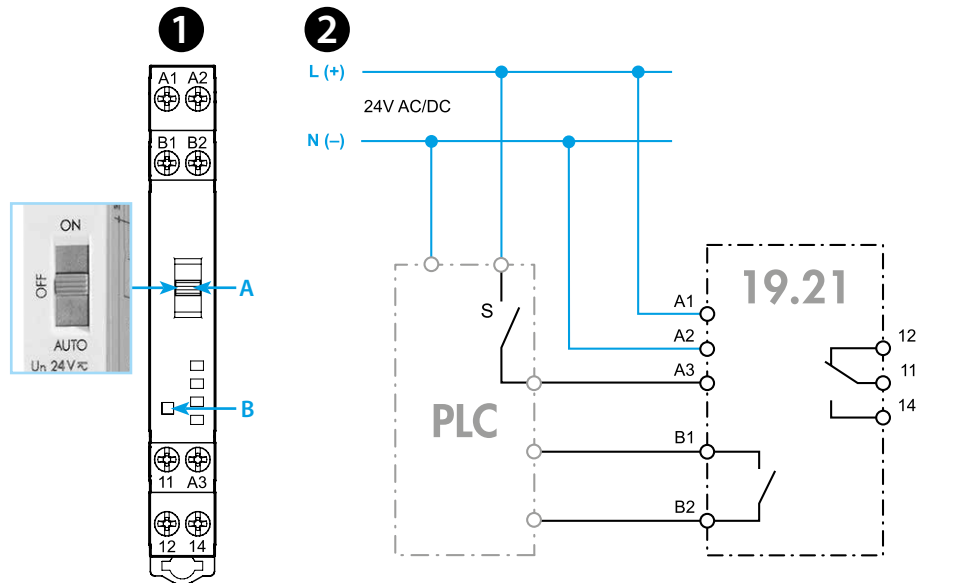

19.21

	19.21.0.024.0000 U _N 24 V AC (50/60 Hz) / DC U _{min} - U _{max} (19.2 - 26.4) V AC/DC P 0.6 VA / 0.4 W
	1CO (SPDT) 10 A 250 V AC
	AC1 2500 VA AC15 (230 V AC) 500 VA (M) (230 V AC) 0.44 kW DC1 (24/110/220)V (10/0.3/0.12)A
	(-20...+50)°C
IP20	

B1 - B2	1 NO (SPST - NO)
	300 mA
	24 V AC/DC

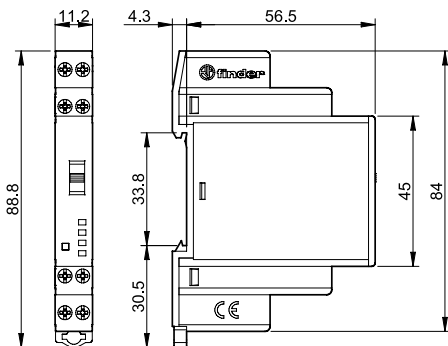

IND. CONT. EQ.
E81856

19.21.0.024.0000

- Maximum Surrounding Air Temperature 50°C
- Use 60/75°C copper (CU) conductors and wire size range No. 14-24 AWG, stranded or solid
- Torque 0.5 Nm
- A1-A2-A3 and B1-B2 shall be supplied by a Class 2 circuit

ENGLISH

19.21 AUTO/OFF/ON OUTPUT MODULE

1 FRONT VIEW

A Function selector switch:

- AUTO works as a monostable relay (following A3 input)
- OFF relay permanently OFF
- ON relay permanently ON

B LED: relay ON

2 CONNECTION DIAGRAM

NOTE

The max switching voltage between B1 and B2 terminal is 24 V AC/DC (300 mA)

3 FUNCTIONAL DIAGRAM

B1 - B2 feed back information to the controller for Auto-operation
A3 - A2 from the controller requested operation