

Modular timers

1 - 6 - 8 - 16 A



Building automation



Elevators and lifts



Automation for blinds, grilles and shutters




Hoists and cranes



Panels for electrical distribution



Door and gate openers

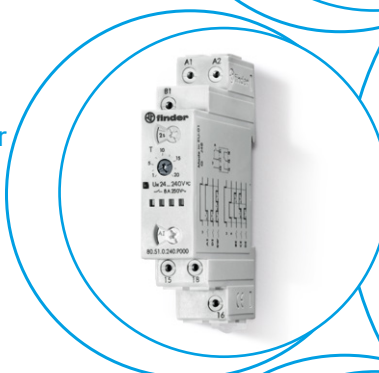

80
SERIES

Multi-function timer range

80.01 - Multi-function & multi-voltage

80.01 NFC - Multi-function & multi-voltage
Can be programmed via smartphone with NFC communication using the Finder Toolbox app (for Android and iOS).

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.01/80.01 NFC
Box clamp



FOR UL RATINGS SEE:
"General technical information" page X

For outline drawing see page 9

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/30	16/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400
Rated load AC1	VA	4000	4000
Rated load AC15 (230 V AC)	VA	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55
Breaking capacity DC1: 24/110/220 V	A	16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)
Standard contact material		AgNi	AgNi

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	12...240	12...240
	V DC	12...240	12...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1	< 1.8/< 1
Operating range	V AC	10.8...265	10.8...265
	V DC	10.8...265	10.8...265

Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h	
Repeatability	%	± 1	± 1
Recovery time	ms	100	100
Minimum control impulse	ms	50	50
Setting accuracy-full range	%	± 5	± 5
Electrical life at rated load in AC1	cycles	50 · 10 ³	50 · 10 ³
Ambient temperature range	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20


Approvals (according to type)

80.01




- Multi-voltage
- Multi-function

- AI:** On-delay
DI: Interval
SW: Symmetrical flasher (starting pulse on)
BE: Off-delay with control signal
CE: On- and off-delay with control signal
DE: Interval with control signal on



Wiring diagram
(without control signal)




Wiring diagram
(with control signal)

NEW 80.01 NFC




- Multi-voltage
- Multi-function
- Programmable via NFC

- AI:** On-delay
DI: Interval
LI: Asymmetrical flasher (starting pulse ON)
BE: Off-delay with control signal
CEb: ON and OFF independent delays with control signal
DE: Interval with control signal on
LE: Asymmetrical flasher (starting pulse on) with control signal



Wiring diagram
(without control signal)



Wiring diagram
(with control signal)

Mono-function timer range**80.11 - On-delay, multi-voltage****80.21 - Interval, multi-voltage****80.41 - Off-delay with control signal, multi-voltage**

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.11/80.21/80.41

Box clamp



FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	16/30	16/30	16/30
Rated voltage/ Maximum switching voltage	V AC	250/400	250/400	250/400
Rated load AC1	VA	4000	4000	4000
Rated load AC15 (230 V AC)	VA	750	750	750
Single phase motor rating (230 V AC)	kW	0.55	0.55	0.55
Breaking capacity DC1: 24/110/220 V	A	16/0.3/0.12	16/0.3/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	500 (10/5)	500 (10/5)
Standard contact material		AgNi	AgNi	AgNi

Supply specification


Nominal voltage (U _N)	V AC (50/60 Hz)	24...240	24...240	24...240
	V DC	24...240	24...240	24...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1	< 1.8/< 1	< 1.8/< 1
Operating range	V AC	16.8...265	16.8...265	16.8...265
	V DC	16.8...265	16.8...265	16.8...265

Technical data


Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h		
Repeatability	%	± 1	± 1	± 1
Recovery time	ms	100	100	100
Minimum control impulse	ms	—	—	50
Setting accuracy-full range	%	± 5	± 5	± 5
Electrical life at rated load in AC1	cycles	50 · 10 ³	50 · 10 ³	50 · 10 ³
Ambient temperature range	°C	-20...+60	-20...+60	-20...+60
Protection category		IP 20	IP 20	IP 20

Approvals (according to type)**80.11**


- Multi-voltage
- Mono-function

AI: On-delayWiring diagram
(without control signal)**80.21**

- Multi-voltage
- Mono-function

DI: IntervalWiring diagram
(without control signal)**80.41**

- Multi-voltage
- Mono-function

BE: Off-delay with control signalWiring diagram
(with control signal)

Mono-function timer range
80.61 - Power off-delay (True off-delay), multi-voltage
80.82 - Star-delta, multi-voltage
80.91 - Asymmetrical flasher, multi-voltage

- 17.5 mm wide
- Rotary range selector, and timing trimmer
- Four time scales from 0.05s to 180 s (type 80.61)
- Four time scales from 0.1 s to 20min (type 80.82)
- Six time scales from 0.1 s to 24 h (type 80.91)
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.61/80.82/80.91
Box clamp



FOR UL RATINGS SEE:
"General technical information" page X

For outline drawing see page 9

Contact specification

Contact configuration	1 CO (SPDT)	2 NO (DPST-NO)	1 CO (SPDT)
Rated current/Maximum peak current	A 8/15	6/10	16/30
Rated voltage/Maximum switching voltage	V AC 250/400	250/400	250/400
Rated load AC1	VA 2000	1500	4000
Rated load AC15 (230 V AC)	VA 400	300	750
Single phase motor rating (230 V AC)	kW 0.3	—	0.55
Breaking capacity DC1: 24/110/220 V	A 8/0.3/0.12	6/0.2/0.12	16/0.3/0.12
Minimum switching load	mW (V/mA) 300 (5/5)	500 (12/10)	500 (10/5)
Standard contact material	AgNi	AgNi	AgNi

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240	24...240	12...240
	V DC	24...220	24...240	12...240
Rated power AC/DC	VA (50 Hz)/W	< 0.6/< 0.6	< 1.3/< 0.8	< 1.8/< 1
Operating range	V AC	16.8...265	16.8...265	10.8...265
	V DC	16.8...242	16.8...265	10.8...265

Technical data

Specified time range		(0.05...2)s, (1...16)s, (8...70)s, (50...180)s	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min	(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1	± 1	± 1
Recovery time	ms	—	100	100
Minimum control impulse	ms	500 (A1-A2)	—	50
Setting accuracy-full range	%	± 5	± 5	± 5
Electrical life at rated load in AC1	cycles	100 · 10 ³	60 · 10 ³	50 · 10 ³
Ambient temperature range	°C	-20...+60	-20...+60	-20...+60
Protection category		IP 20	IP 20	IP 20


Approvals (according to type)



80.61

- Multi-voltage
- Mono-function


BI: Power off-delay (True off-delay)



80.82

- Multi-voltage
- Mono-function
- Transfer time can be regulated (0.05...1)s


SD: Star-delta



80.91

- Multi-voltage
- Mono-function

LI: Asymmetrical flasher (starting pulse on)
LE: Asymmetrical flasher (starting pulse on) with control signal



Multi-function and multi-voltage

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- New multi-voltage versions with "PWM clever" technology

80.51.0.240.0000
Box clamp80.51.0.240.P000
Push-in terminal

FOR UL RATINGS SEE:

"General technical information" page X

For outline drawing see page 9

Contact specification


Contact configuration		1 CO (SPDT)
Rated current/Maximum peak current	A	8/16
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2000
Rated load AC15 (230 V AC)	VA	400
Single phase motor rating (230 V AC)	kW	0.3
Breaking capacity DC1: 24/110/220 V	A	8/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)
Standard contact material		AgNi

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power AC/DC	VA (50 Hz)/W	< 1.8/< 1
Operating range	V AC	17...265
	V DC	17...265



Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1
Recovery time	ms	≤ 50
Minimum control impulse	ms	50
Setting accuracy-full range	%	± 5
Electrical life at rated load in AC1	cycles	100 · 10 ³
Ambient temperature range	°C	-20...+60
Protection category		IP 20

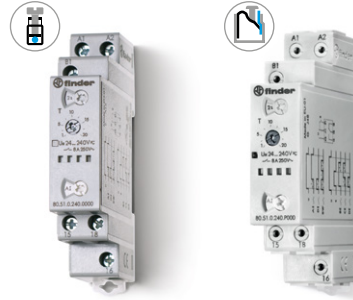Approvals (according to type)**80.51**

- Multi-voltage (24...240) V AC/DC
- Multi-function

- AI:** On-delay
DI: Interval
SW: Symmetrical flasher (starting pulse on)
BE: Off-delay with control signal
CE: On- and off-delay with control signal
DE: Interval with control signal on

Wiring diagram
(without control signal)Wiring diagram
(with control signal)

Multi-function and multi-voltage solid-state output timer

- 17.5 mm wide
- Six time scales from 0.1 s to 24 h
- High input/output isolation
- 35 mm rail (EN 60715) mount
- Multi-voltage output (24...240 V AC/DC), independent from the input voltage
- "Blade + cross" - both flat blade and cross head screw drivers can be used to adjust the range and function selectors, the timing trimmer, and to disengage the rail mounting clip
- Multi-voltage input with "PWM clever" technology

80.71
Box clamp




80.71




- Multi-voltage
- Multi-function

- AI:** On-delay
DI: Interval
SW: Symmetrical flasher (starting pulse on)
BE: Off-delay with control signal
CE: On- and off-delay with control signal
DE: Interval with control signal on



Wiring diagram
(without control signal)



Wiring diagram
(with control signal)

For outline drawing see page 9

Output circuit

Contact configuration		1 NO (SPST-NO)
Rated current	A	1
Rated voltage	V AC/DC	24...240
Switching voltage range	V AC/DC	19...265
Rated load AC15	A	1
Rated load DC1	A	1
Minimum switching current	mA	0.5
Max. "OFF-state" leakage current	mA	0.05
Max. "ON-state" voltage drop	V	2.8

Input circuit

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power	VA (50 Hz)/W	1.3/1.3
Operating range	V AC	19...265
	V DC	19...265

Technical data

Specified time range		(0.1...2)s, (1...20)s, (0.1...2)min, (1...20)min, (0.1...2)h, (1...24)h
Repeatability	%	± 1
Recovery time	ms	100
Minimum control impulse	ms	50
Setting accuracy-full range	%	± 5
Electrical life	cycles	100 · 10 ⁶
Ambient temperature range	°C	-20...+50
Protection category		IP 20

Approvals (according to type)



Ordering information

Example: 80 series, modular timers, 1 CO (SPDT) - 16 A, supply rated at (12...240)V AC/DC.

8 0 . 0 1 . 0 . 2 4 0 . 0 0 0 0

Series

Type

- 0 = Multi-function (AI, DI, SW, BE, CE, DE)
- 0 = Multi-function (AI, DI, LI, BE, CEb, DE, LE)
only for 80.01 NFC
- 1 = On-delay (AI)
- 2 = Interval (DI)
- 4 = Off-delay with control signal (BE)
- 5 = Multi-function (AI, DI, SW, BE, CE, DE)
- 6 = Power off-delay (True off-delay) (BI)
- 7 = Multi-function with solid state output
(AI, DI, SW, BE, CE, DE)
- 8 = Star-delta (SD)
- 9 = Asymmetrical flasher (LI, LE)

Versions

- 0 = Standard
- N = NFC (only for 80.01 NFC)
- P = Push-in (only for 80.51.0.240.P000)

Supply voltage

- 240 = (12...240)V AC/DC (80.01, 80.01 NFC, 80.91)
- 240 = (24...240)V AC/DC
(80.11, 80.21, 80.41, 80.51, 80.71, 80.82)
- 240 = (24...240)V AC, (24...220)V DC (80.61)

Supply version

- 0 = AC (50/60 Hz)/DC

No. of poles

- 1 = 1 CO (SPDT)
- 1 = 1 NO (SPST-NO), type 80.71 only
- 2 = 2 NO (DPST-NO), type 80.82 only

Technical data

Insulation


Dielectric strength		80.01/80.01 NFC/11/21/41/51/82/91	80.61	80.71
	between input and output circuit	V AC	4000	2500
	between open contacts	V AC	1000	—
Insulation (1.2/50 µs) between input and output		kV	6	4

EMC specifications

Type of test	Reference standard	80.01 / 80.01 NFC/11/21/41/61/71/91	80.51/82	
Electrostatic discharge	contact discharge	EN 61000-4-2	4 kV	
	air discharge	EN 61000-4-2	8 kV	
Radio-frequency electromagnetic field (80 ÷ 1000 MHz)	EN 61000-4-3	10 V/m	10 V/m	
Fast transients (burst) (5-50 ns, 5 kHz) on Supply terminals	EN 61000-4-4	4 kV	4 kV	
Surges (1.2/50 µs) on Supply terminals	common mode	EN 61000-4-5	4 kV	
	differential mode	EN 61000-4-5	4 kV	
	on start terminal (B1)	common mode	EN 61000-4-5	4 kV
	differential mode	EN 61000-4-5	4 kV	
Radio-frequency common mode (0.15 ÷ 80 MHz) on Supply terminals	EN 61000-4-6	10 V	10 V	
Magnetic field immunity	EN 61000-4-8	40 A/m	—	
Radiated and conducted emission	EN 55011	class B	class A	


Other data

Current absorption on signal control (B1)	< 1 mA		
Power lost to the environment	without contact current	W	1.4
	with rated current	W	3.2


Terminals		Box clamp	Push-in terminals (only for 80.51.0.240.P000)		
Wire strip length	mm	8	10		
 Screw torque	Nm	0.8	—		
Max. wire size		solid cable	stranded cable	solid cable	stranded cable
	mm ²	1 x 4 / 2 x 2.5	1 x 4 / 2 x 2.5	1 x 2.5 / 2 x 2.5	1 x 2.5 / 2 x 2.5
	AWG	1 x 12 / 2 x 14	1 x 12 / 2 x 14	1 x 14 / 2 x 14	1 x 14 / 2 x 14

Outline drawings


Types
80.01/80.51
Box clamp

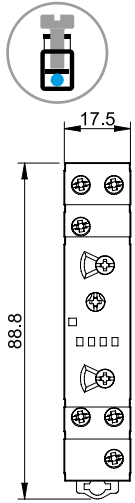


Types
80.11/80.21/80.61
Box clamp

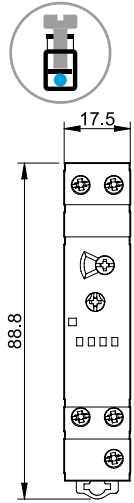


Type 80.41
Box clamp

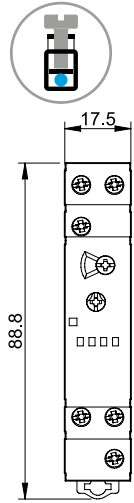



Type 80.91
Box clamp

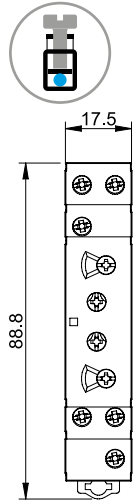


Type 80.71
Box clamp

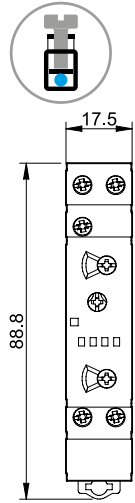

Type 80.82
Box clamp

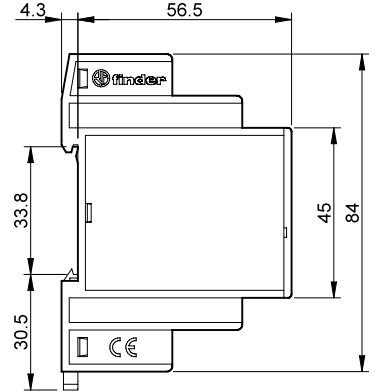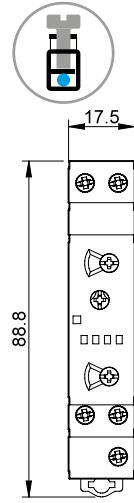


Type 80.51.0.240.P000
Push-in terminal

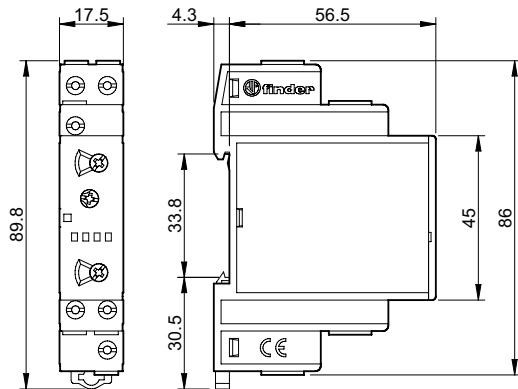


Times scales


80 Series rotary switch positions




(0.1...2)s




(1...20)s




(0.1...2)min



(1...20)min



(0.1...2)h




(1...24)h



Note: 80.01 NFC time scale settings are via the Finder Toolbox app (for Android and iOS)

Accessories



060.48

Sheet of marker tags (CEMBRE Thermal transfer printers) for relays types
80.01/80.01 NFC/11/21/41/51/61/71 (48 tags), 6 x 12 mm

060.48

LED

LED	Supply voltage	NO output contact	Contacts	
			Open	Closed
	OFF	Open	15 - 18	15 - 16
	ON	Open	15 - 18	15 - 16
	ON	Open (Timing in Progress)	15 - 18	15 - 16
	ON	Closed	15 - 16	15 - 18

- 80.01 NFC: the led will flicker fast for 3 seconds to confirm that program has been transferred correctly (only with timer powered).
- 80.61: The LED is illuminated on type 80.61 is illuminated only when the supply voltage is applied to the timer; during the timing period the LED is not illuminated.



Functions

Without control signal = Start via contact in supply line (A1).
 With control signal = Start via contact into control terminal (B1).

Wiring diagram



U= Supply voltage S= Signal switch = Output contact

Without control signal

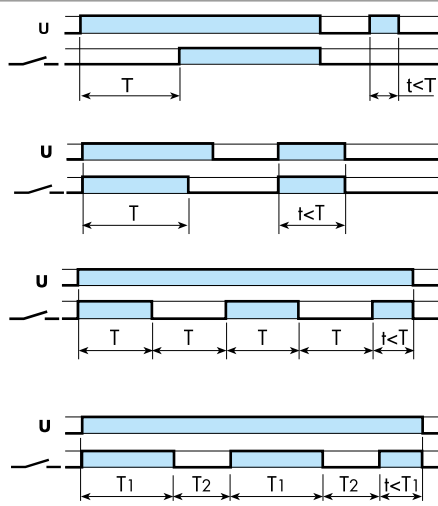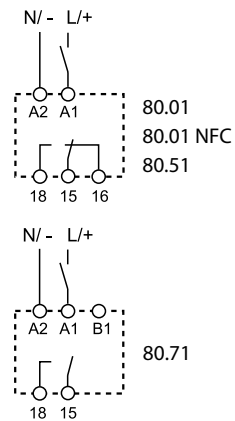

- (AI) ON-delay.**
Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.
- (DI) Interval.**
Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.
- (SW) Symmetrical flasher (starting pulse ON) - only for 80.01, 80.51 and 80.71.**
Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ratio is 1:1 (time on = time off).
- (LI) Asymmetrical flasher (starting pulse ON) - only for 80.01 NFC.**
Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ON (T1) and OFF (T2) user-settable.

With control signal

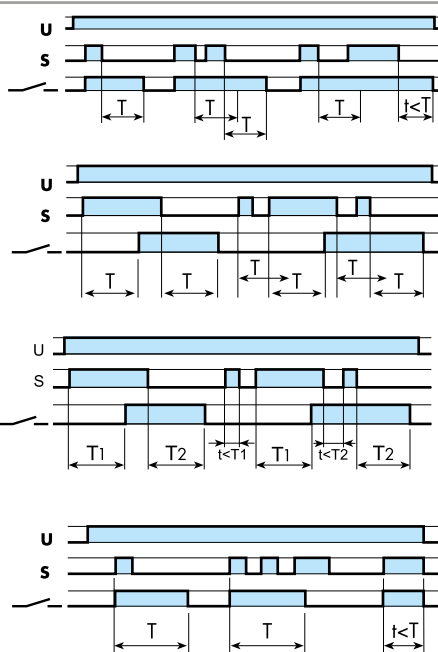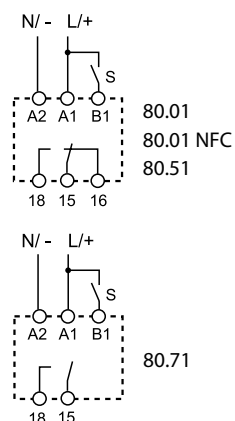

- (BE) OFF-delay with control signal.**
Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.
- (CE) ON- and OFF-delay with control signal - only for 80.01, 80.51 and 80.71.**
Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay, after which time the output contacts transfer. Opening the Signal switch initiates the same preset delay, after which time the output contacts reset.
- (CEb) ON and OFF independent delays with control signal - only 80.01 NFC.**
Power is permanently applied to the timer. Closing the Signal Switch (S) initiates the preset delay T1, after which the output contact transfers. Opening the Signal switch initiates the preset delay T2, after which the output contact resets.
- (DE) Interval with control signal ON.**
Power is permanently applied to the timer. On momentary or maintained closure of Signal Switch (S), the output contacts transfer, and remain so for the duration of the preset delay, after which they reset.

NOTE: The function must be set before energising the timer.

Functions



Wiring diagram

U= Supply voltage


S= Signal switch

= Output contact


Without control signal




(AI) ON-delay.
Apply power to timer. Output contacts transfer after preset time has elapsed. Reset occurs when power is removed.



(DI) Interval.
Apply power to timer. Output contacts transfer immediately. After the preset time has elapsed, contacts reset.





(BI) Power OFF-delay (True OFF-delay).
Apply power to timer (minimum 500 ms). Output contacts transfer immediately. Removal of power initiates the preset delay, after which time the output contacts reset.

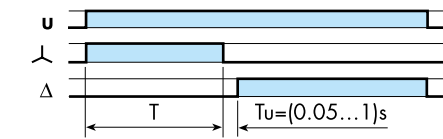



(SD) Star-delta.
Apply power to timer. The star contact (λ) closes immediately. After preset delay has elapsed the star contact (λ) resets. After a further transfer time variable from (0.05...1)s the delta contact (Δ) closes and remains in that position, until reset on power off.

With control signal

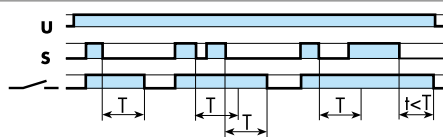



(BE) OFF-delay with control signal.
Power is permanently applied to the timer. The output contacts transfer immediately on closure of the Signal Switch (S). Opening the Signal Switch initiates the preset delay, after which time the output contacts reset.

Without control signal




(LI) Asymmetrical flasher (starting pulse ON).
Apply power to timer. Output contacts transfer immediately and cycle between ON and OFF for as long as power is applied. The ON (T₁) and OFF (T₂) times are independently adjustable.

With control signal

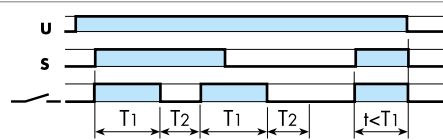


(LE) Asymmetrical flasher (starting pulse ON) with control signal
Power is permanently applied to the timer. Closing Signal Switch (S) causes the output contacts to transfer immediately and cycle between ON (T₁) and OFF (T₂), until opened.


NOTE: The function must be set before energising the timer.



• Possible to control an external load, such as another relay coil or timer, connected to the control signal terminal B1.



* With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1).



** A voltage other than the supply voltage can be applied to the command Start (B1), example:
A1 - A2 = 230 V AC
B1 - A2 = 12 V DC

