

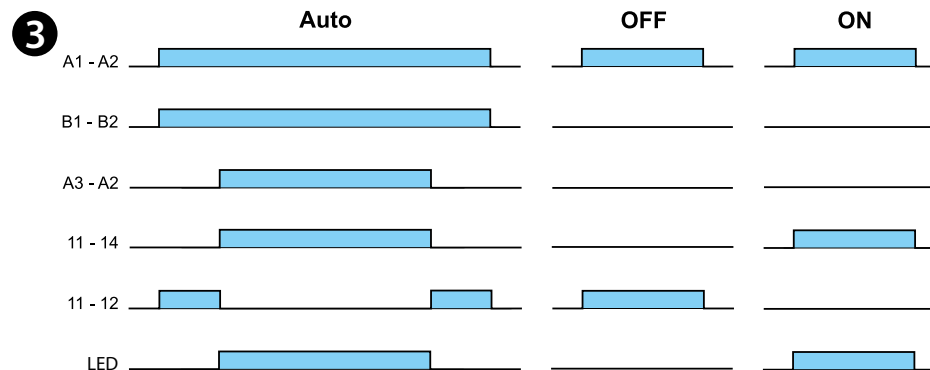


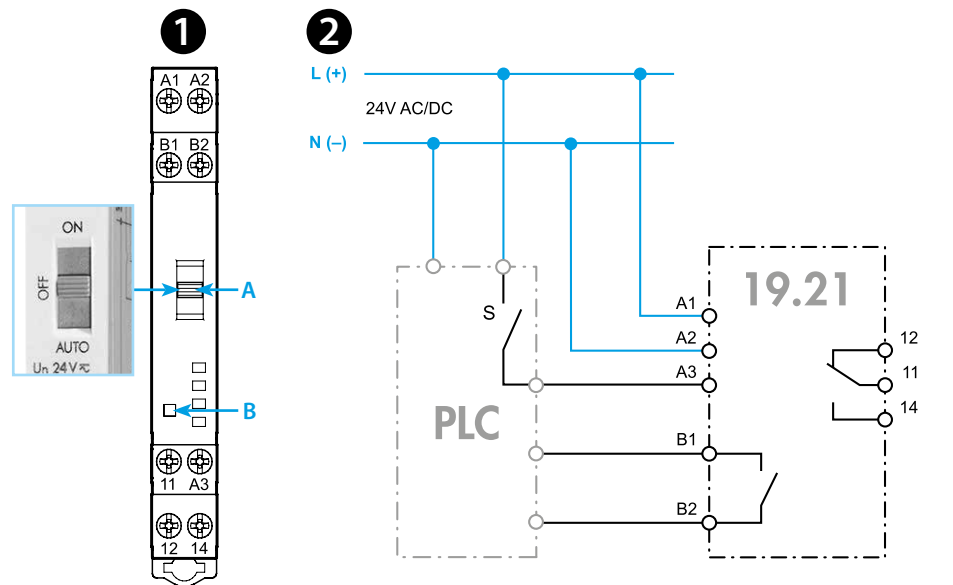

19.21

	19.21.0.024.0000 U _N 24 V AC (50/60 Hz) / DC U _{min} - U _{max} (19.2 - 26.4) V AC/DC P 0.6 VA / 0.4 W
	1CO (SPDT) 10 A 250 V AC
	AC1 2500 VA
	AC15 (230 V AC) 500 VA
	(M) (230 V AC) 0.44 kW
	DC1 (24/110/220)V (10/0.3/0.12)A
	(-20...+50)°C
IP20	

B1 - B2	1 NO (SPST - NO)
	300 mA
	24 V AC/DC

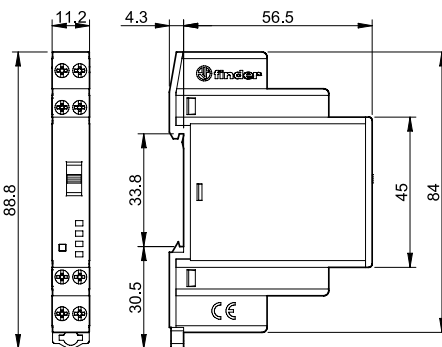

IND. CONT. EQ.
E81856

19.21.0.024.0000

- Maximum Surrounding Air Temperature 50°C
- Use 60/75°C copper (CU) conductors and wire size range No. 14-24 AWG, stranded or solid
- Torque 0.5 Nm
- A1-A2-A3 and B1-B2 shall be supplied by a Class 2 circuit

ESPAÑOL

19.21
INTERFAZ AUTO/OFF/ON

1 VISTA FRONTAL

A Selector de funciones:

- AUTO funcionamiento como relé monostable (mediante la entrada A3)
- OFF relé siempre desexcitado
- relé siempre excitado

B LED: relé ON

2 CONEXION

NOTA

La máxima tensión de conmutación entre los terminales B1 y B2 es 24 V AC/DC (300 mA)

3 DIAGRAMA DE FUNCIONES

B1 - B2 Señal de retorno al controlador cuando está funcionando en "Auto"

A3 - A2 Función demandada por el controlador