



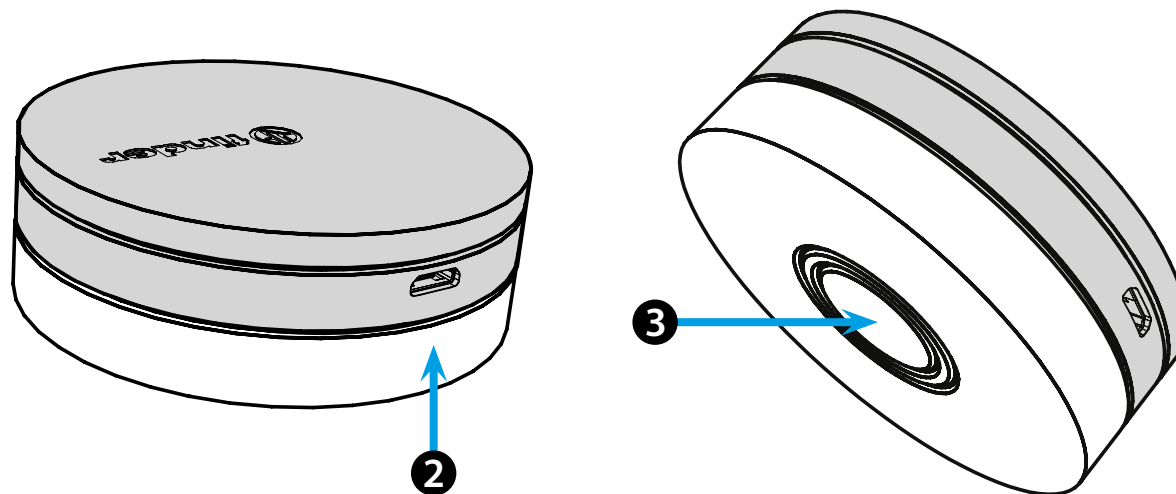

1Y.GU.005.1
2nd GENERATION

Utility Model: -IB1YGU0051VXX - 06/24 - Finder S.p.A. con unico socio - 10040 ALMESE (TO) - ITALY

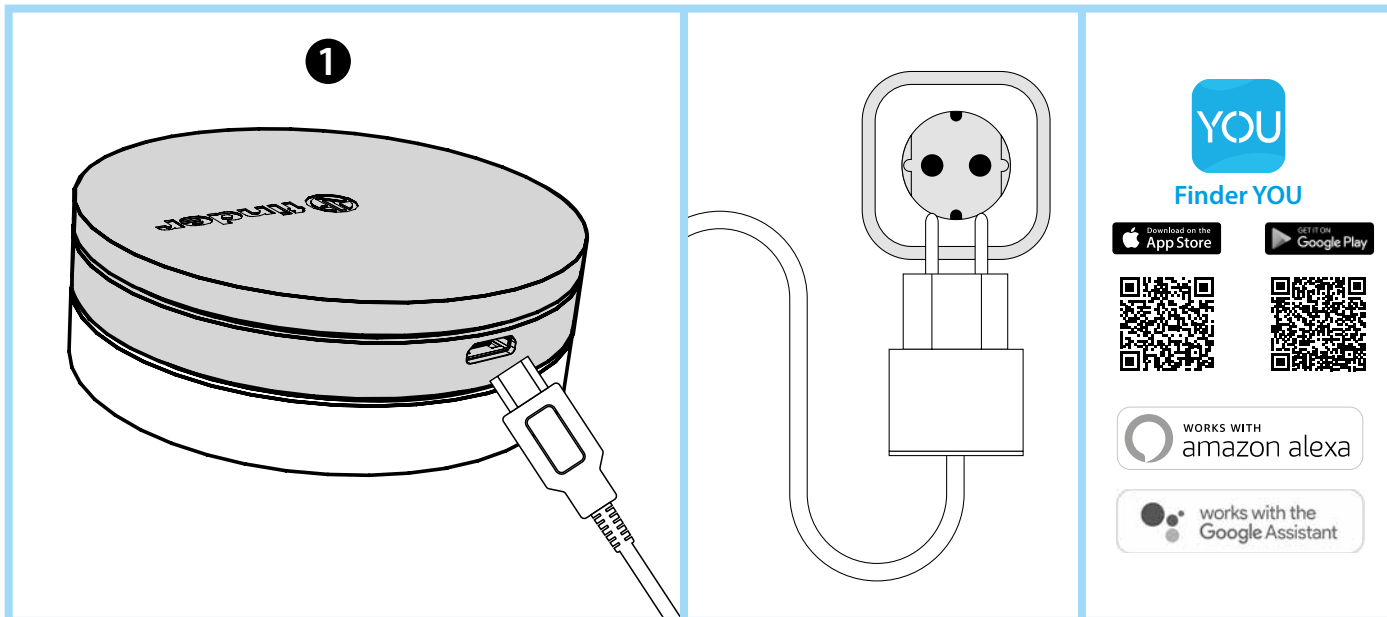

ENGLISH

1Y.GU.005.1
GATEWAY 2nd GENERATION Wi-Fi 2.4 GHz - Radio 868 MHz

1 INSTALLATION

Connect the Micro USB connector to the Gateway and the power supply to the electrical outlet.
After switching on, the Gateway's luminous base will flash with a fading white light, awaiting configuration.
Use the **FINDER YOU** app both for configuring the BLISS2 smart chronothermostat and for YESLY systems.
For more information: scan the QR code below.

2 LUMINOUS BASE

WHITE LED

- **Flashing fading:** waiting for configuration
- **Fixed:** connection established with both the Wi-Fi network and the Cloud
- **2 flashes:** connected only to the Wi-Fi network - no connection to the Cloud (internet not active)
- **3 flashes:** no connection to the Wi-Fi network and no connection to the Cloud (internet not active)

BLUE LED

Flashing: sending Bluetooth commands to the devices

RED LED

Flashing: commands are sent to the Smart Bliss2 thermostat

3 GATEWAY SETTING

- To change the light intensity of the GATEWAY base:
- press the button once: Low brightness
 - press the button twice: Medium-Low brightness
 - press the button 3 times: Medium-High brightness
 - press the button 4 times: High brightness

RESET

Press the button for > 10 seconds to reset the settings to factory