
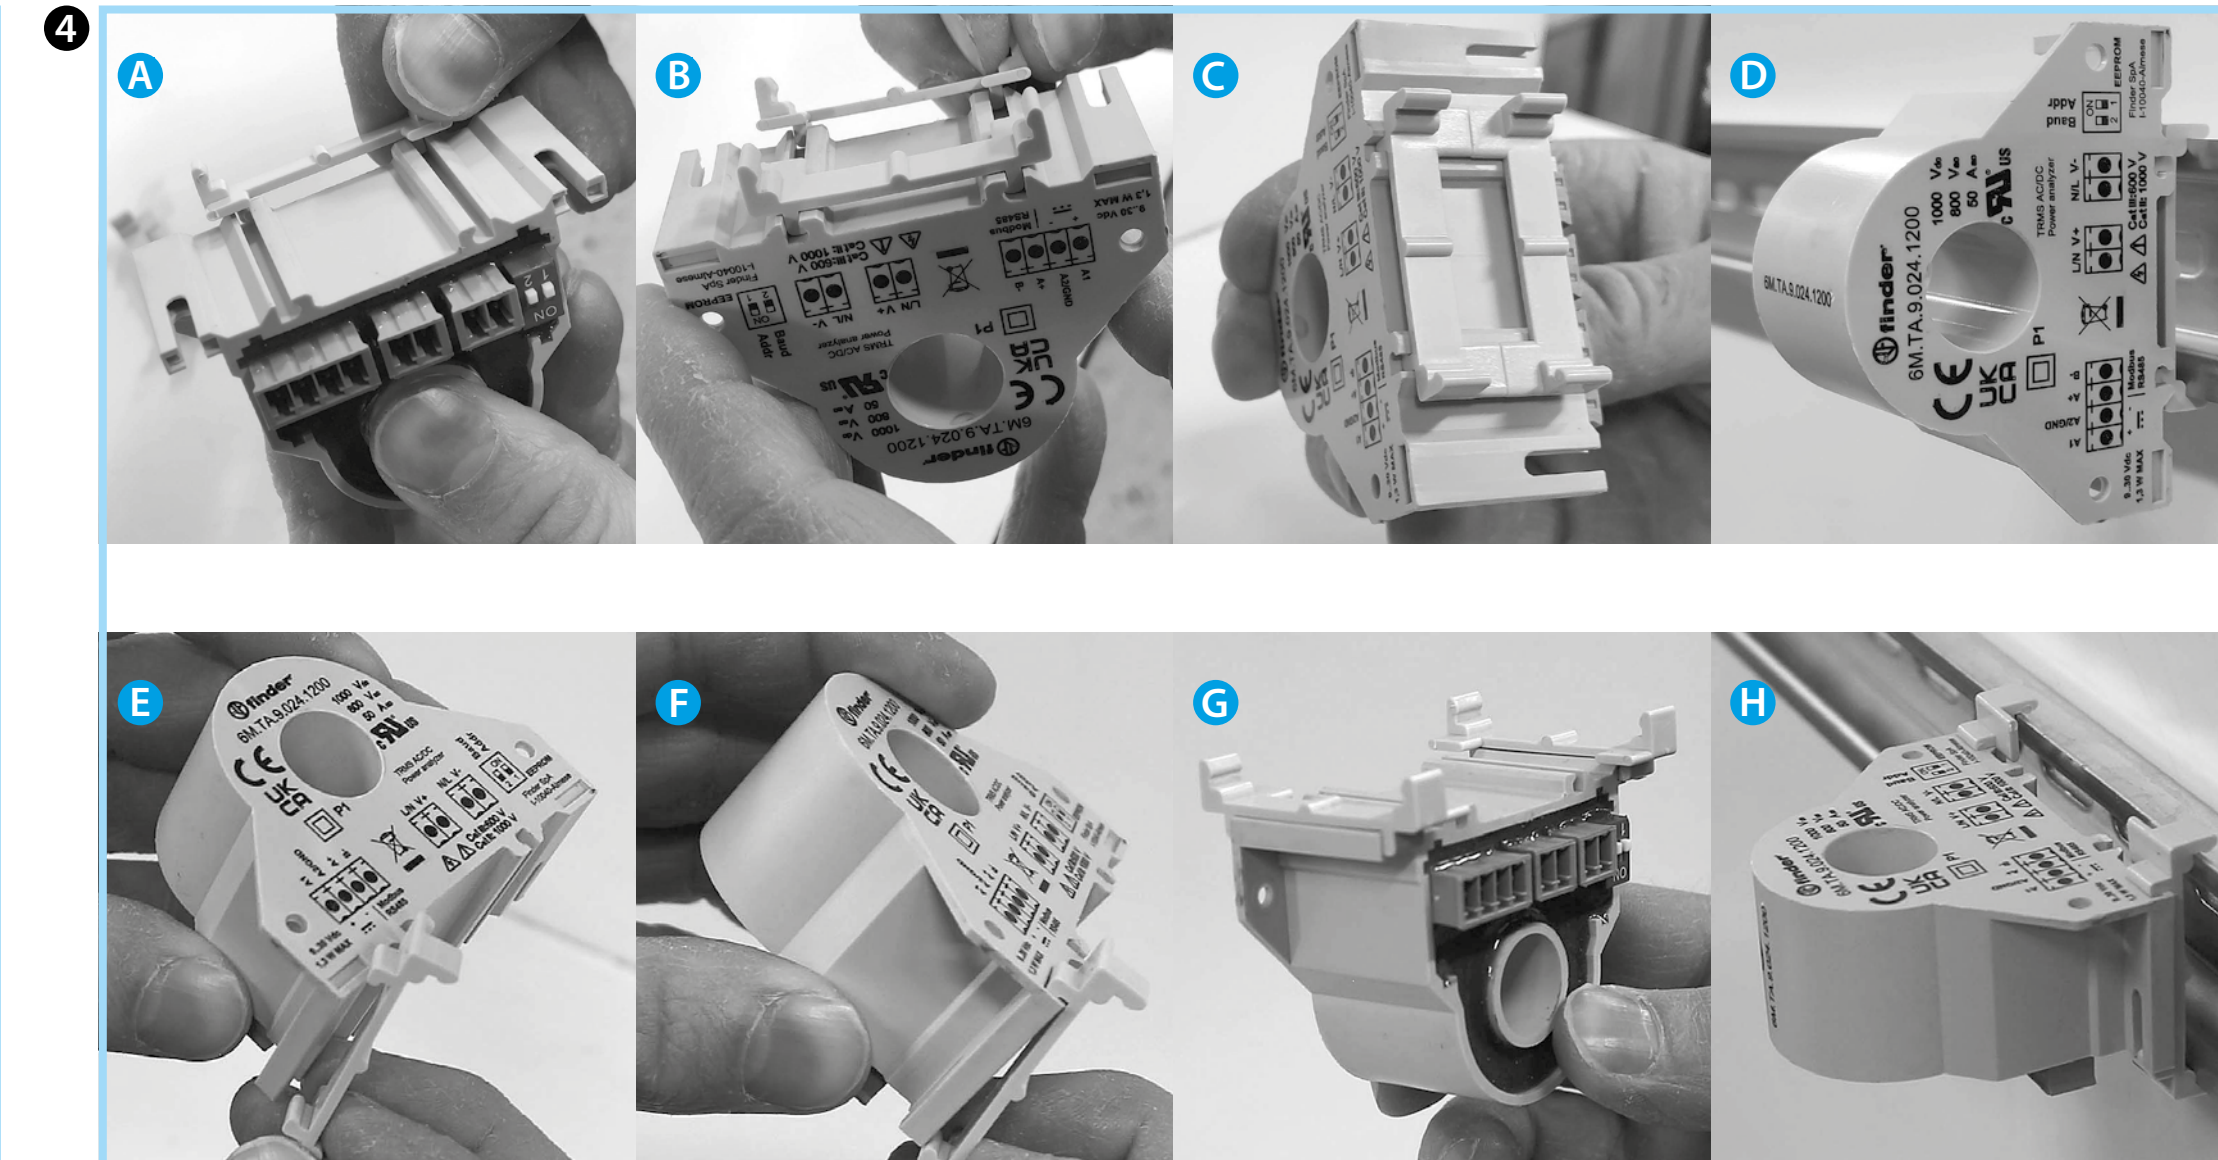
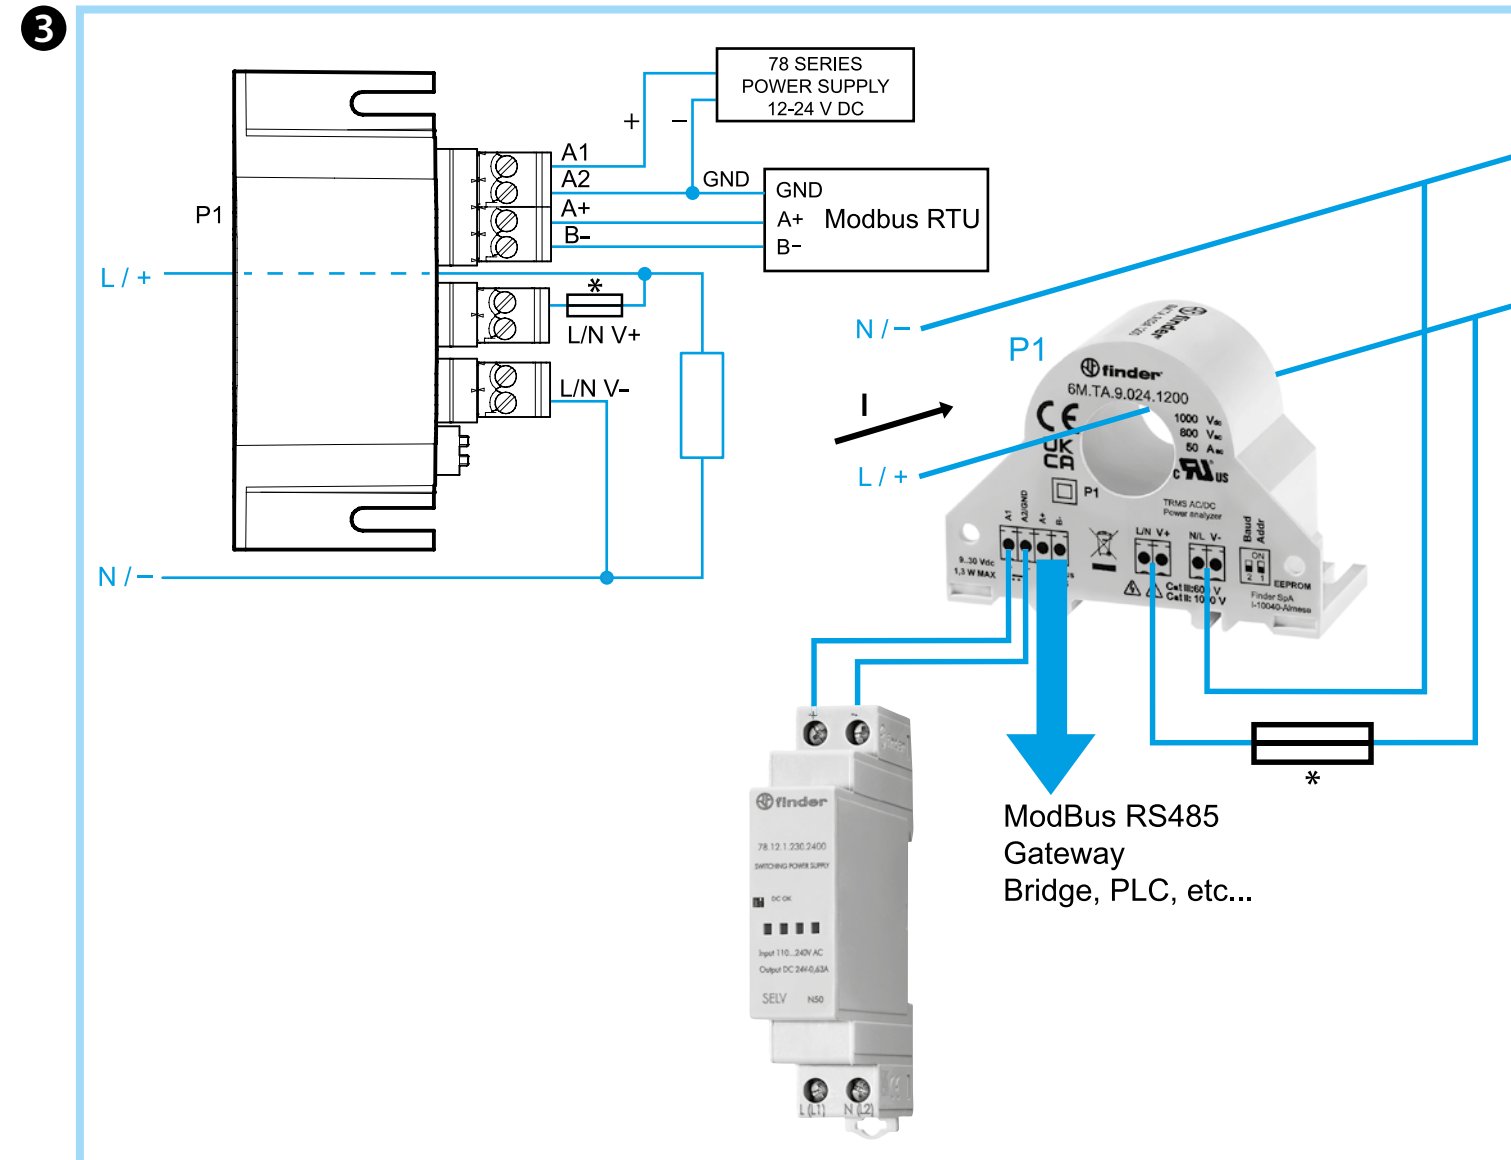

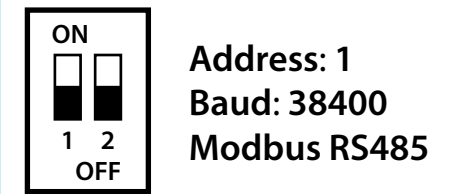
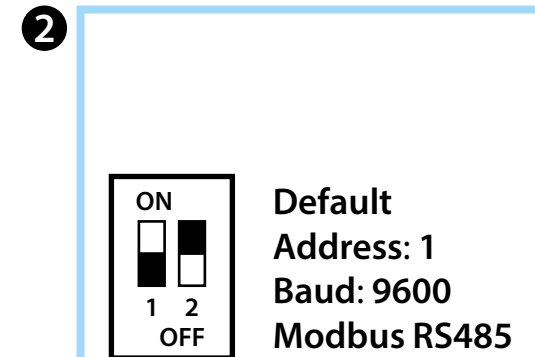


6M.Tx

6M.Tx.9.024.1200			
TRMS AC or DC MODBUS POWER MONITOR	6M.TA	6M.TB	6M.TF
I _{max} / U _{max} AC	50/800	100/800	300/800
I _{max} / U _{max} DC	50/1000	100/1000	400/1000
U DC	9... 24 (U _N)...30		
Modbus RS485	1200...115200 baud, 8, N, 1		
T (-15...+65)°C			
IP 20			

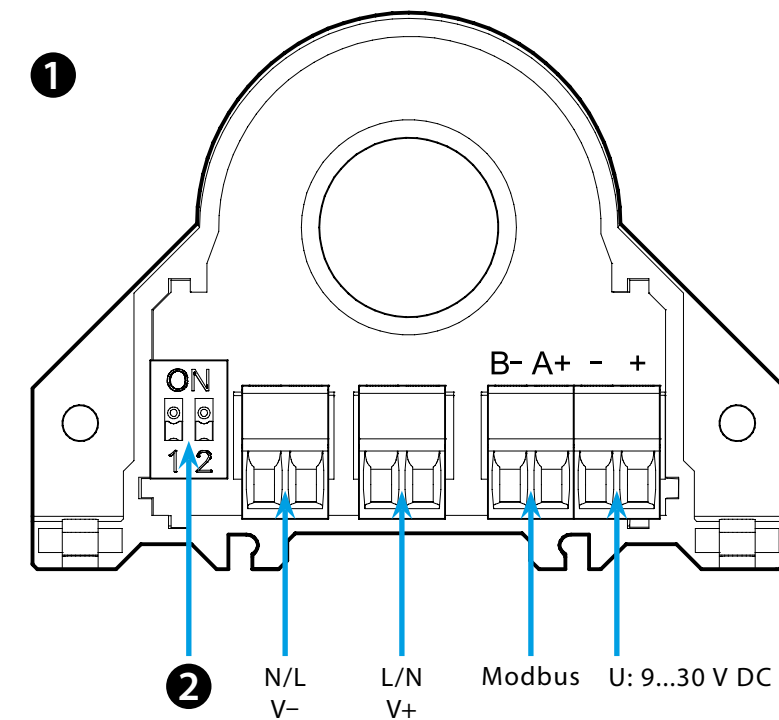

6M.Tx.9.024.1200
ANALIZADOR DE RED MONOFÁSICO CON MODBUS RS485

- BORNES DE CONEXIÓN**
 - AJUSTES**
* Ajustes seleccionados guardados en memoria interna (EEPROM)
 - ESQUEMA DE CONEXIONADO**
* 100 mA - Tipo lento
 - MONTAJE EN CARRIL DIN**
A-B-C-D Vertical
E-F-G-H Horizontal
- NOTAS
Manual completo en website de Finder

