
















77.31





	77.31.x.xxx.80x0	77.31.x.xxx.80x1
	<ul style="list-style-type: none"> U_N 24 V DC $U_{min}-U_{max}$ (4-32)V DC P 0.4 W 	
	<ul style="list-style-type: none"> U_N 24 V AC (50/60 Hz) $U_{min}-U_{max}$ (16-32)V AC P 0.24VA (50Hz)/0.4 W 	
	<ul style="list-style-type: none"> U_N 230 V AC (50/60 Hz) $U_{min}-U_{max}$ (40-280)V AC P 7.5 VA (50 Hz)/0.9 W 	
	1 NO (SPST-NO) 30 A (48...480)V AC	
	AC7a (cos fi=0.8) 30 A	AC7a (cos fi=0.8) 30 A
	AC15 20 A	AC15 20 A
	(M) (230 V AC) -	(M) (230 V AC) 1.5 kW
	(230 V) 6000 W	(230V) 4500 W
	CFL / LED 4000 W	CFL / LED 2500 W
	6000 W	4000 W
	(-20...+80)°C	
	IP20	

LED	U_N
	OFF
	ON



- For use in Pollution Degree 2 Environment
- Control circuits, for version 230 V AC only, shall be connected, in the end-use Application, to any Din-rail Surge Protective Device R/C (VZCA2/8) rated min. 240 V AC, 50/60 Hz, VPR=1000 V, Type 3
- Use 75°C copper (CU) conductors for power terminals (13, 14) and 60/75°C copper (CU) conductors the control terminals (A1, A2) of the devices.

Utility Model - IB7731001 - 12/24 - Finder S.p.A. con unico socio - 10040 ALMESE (TO) - ITALY

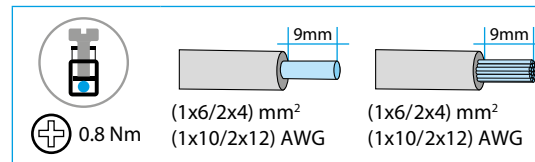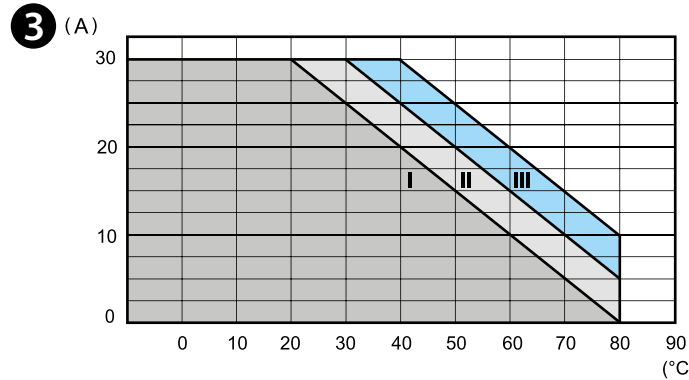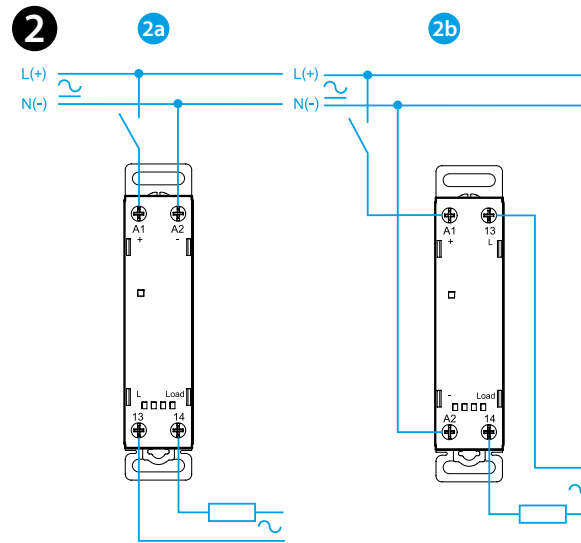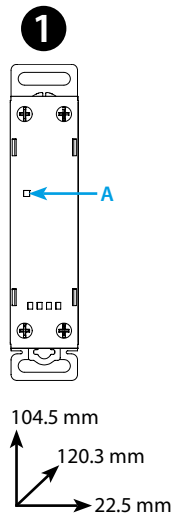

ENGLISH

77.31 MODULAR SOLID STATE RELAY

1 FRONT VIEW A = LED

2 WIRING DIAGRAM

2a Connection 77.31-805x

2b Connection 77.31-807x

3 OUTPUT SPECIFICATION

Output RMS current vs. ambient temperature

- I - Modular SSR installed as a group (without gap)
- II - Modular SSR installed as a group (20 mm gap between each SSR)
- III - Modular SSR installed individually in free air, or with a gap \geq 40 mm, which implies a not significant influence from nearby components

OTHER DATA

- AC output (with triac)
- Zero-crossing versions 77.x.xxx.80x0
- Random versions 77.x.xxx.80x1
- Minimum switching current (@ 400 V): 300 mA
- Power loss (@ 30 A): 16 W
- 35 mm rail (EN 60715) mount