

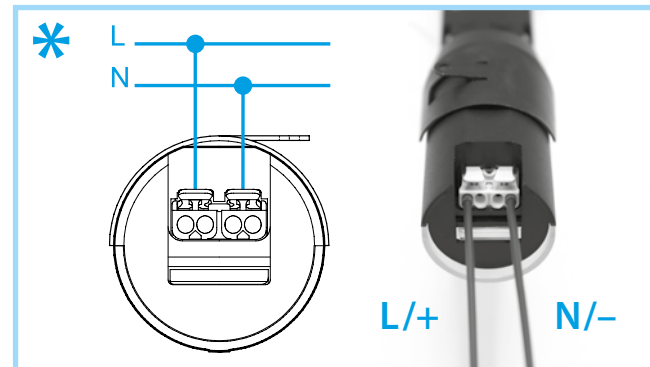
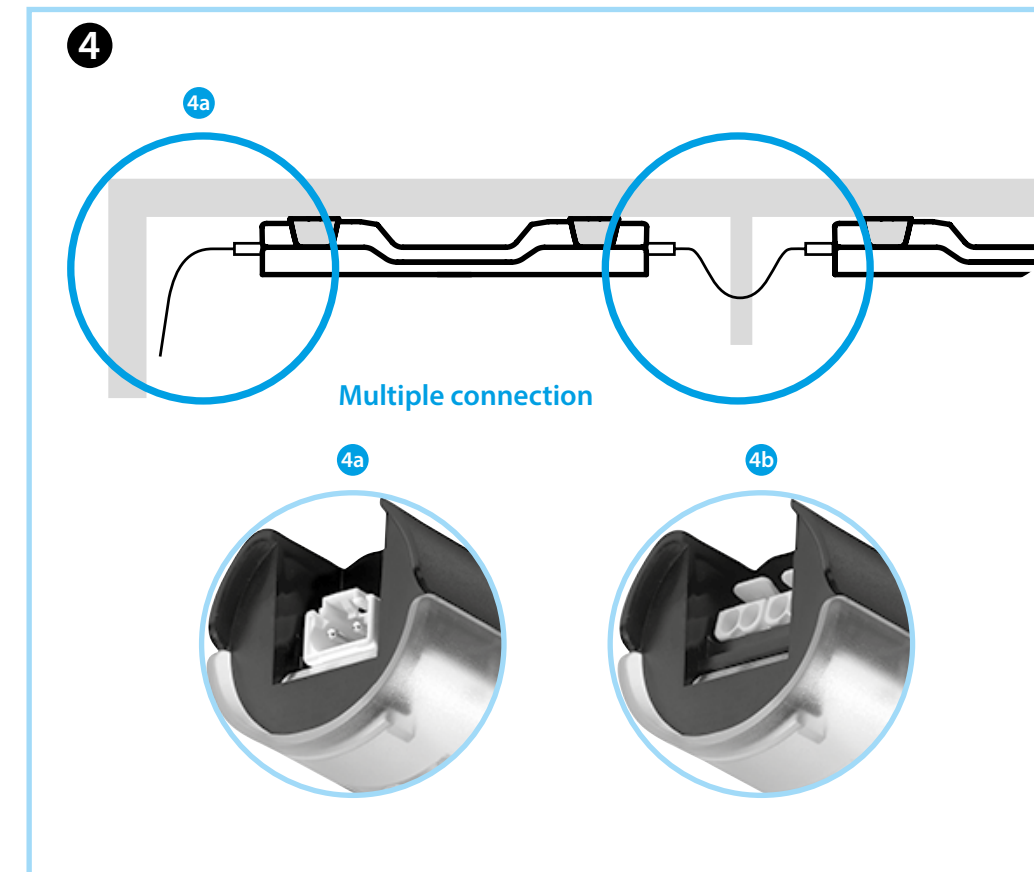





7L.4X

	7L.43.0.xxx.xx00 7L.46.0.xxx.xx00 U _N 12...48 V AC/DC U _N 110...240 V AC/DC	
Lumen	7L.43 600	7L.46 1200
Watt	6	9
Light colour	5000 K	
	-30...+55°C	
	IP20	



For Canadian market, in the end-use the devices shall be connected to a Surge-Protective device, Type 1 or 2 or 3, rated minimum 240 V and with a maximum Voltage Protection Rating (VPR) of 2500 Vpk for 7L.4x.0.230.xxxx, rated minimum 50 V and with a VPR 800 Vpk for 7L.4x.0.024.xxxx

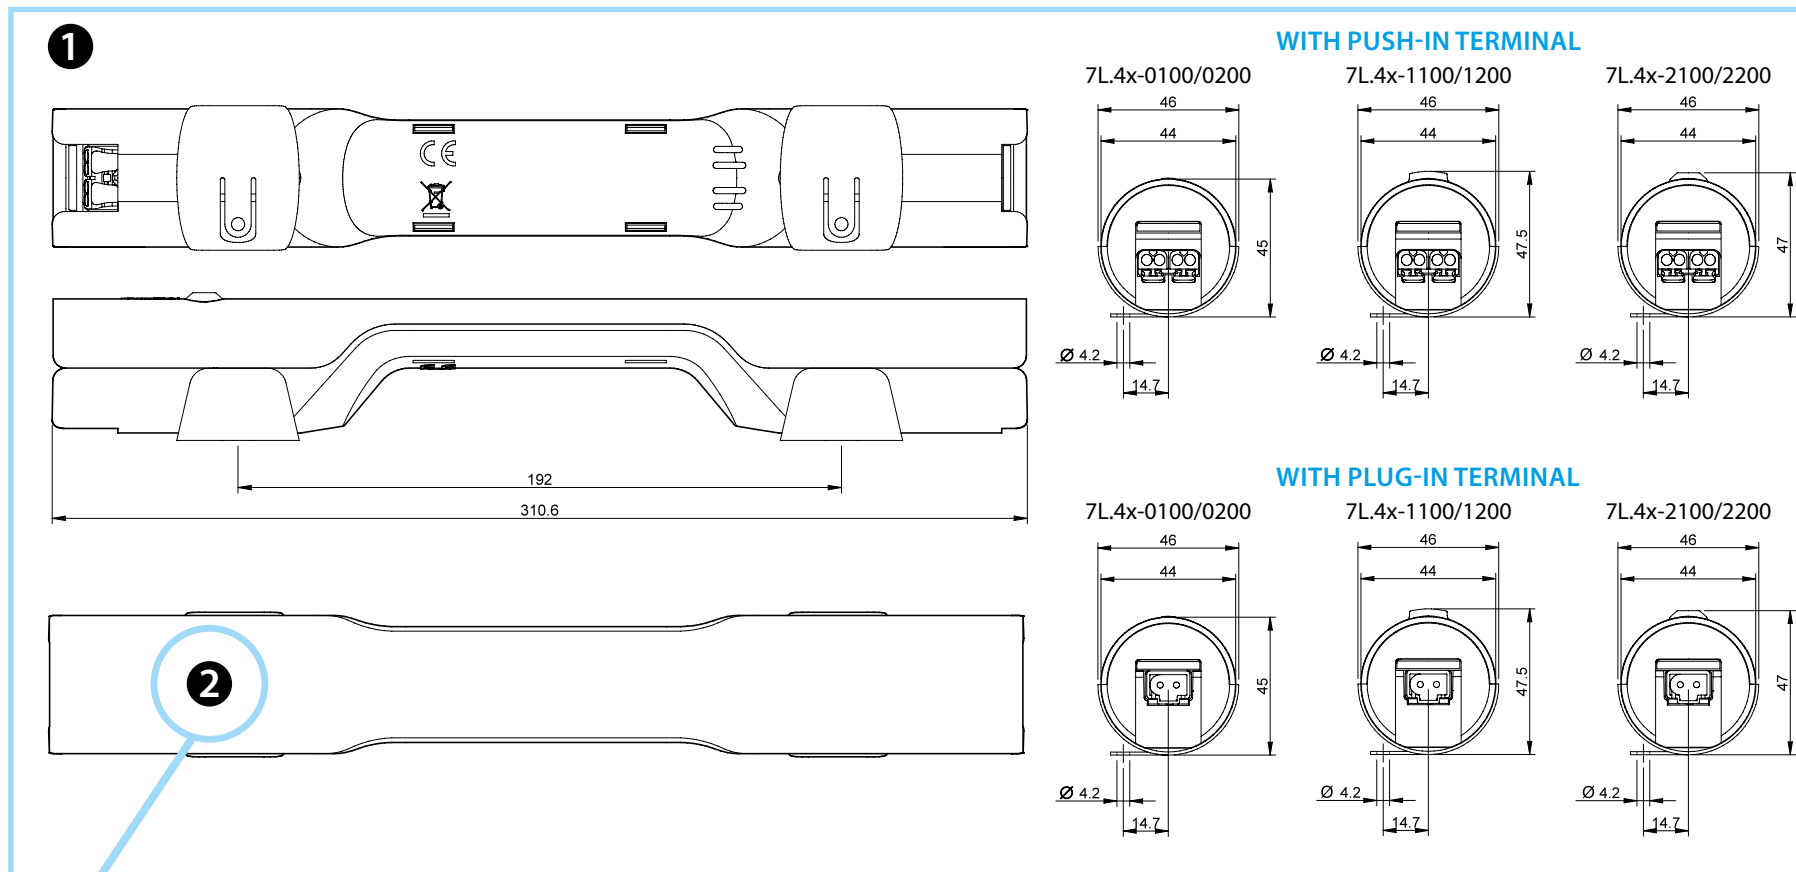

ITALIANO

LAMPADA DA QUADRO 7L
7L.43 (600 lumen)
7L.46 (1200 lumen)

- DIMENSIONI**
- VERSIONI**
 - 2a Con pulsante ON/OFF
 - 2b Con rilevatore di movimento
 - 2c Senza pulsante ON/OFF né rilevatore di movimento
- MONTAGGIO**
 - 3a Fissaggio magnetico diretto su una superficie in acciaio
 - 3b Fissaggio tramite supporto avvitato per il montaggio su altri materiali
- CABLAGGIO**
 - 4a Con connettori plug-in adatti per collegamenti singoli/multipli
 - 4b Con morsetti push-in per collegamenti singoli
- ACCESSORI**
 - 5a Connettore femmina 07L.11
 - 5b Connettore maschio 07L.12

NOTE
Vita elettrica: 60000h
7L...0100 Senza pulsante ON/OFF né rilevatore di movimento, terminali push-in
7L...0200 Senza pulsante ON/OFF né rilevatore di movimento, connettori plug-in
7L...1100 Con pulsante ON/OFF e terminali push-in
7L...1200 Con pulsante ON/OFF e connettori plug-in
7L...2100 Con rilevatore di movimento e terminali push-in (T= 3 min)
7L...2200 Con rilevatore di movimento e connettori plug-in (T= 3 min)

* Collegamento corretto da eseguire