



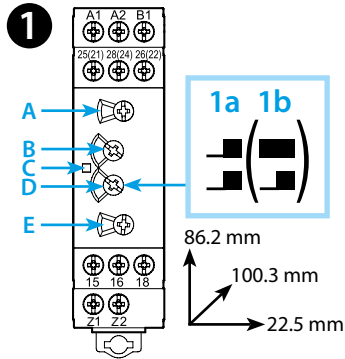











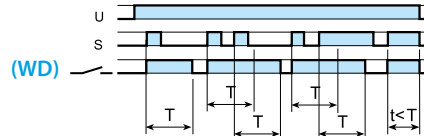
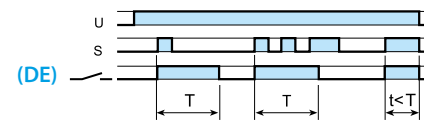
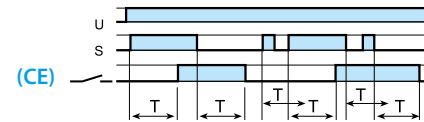

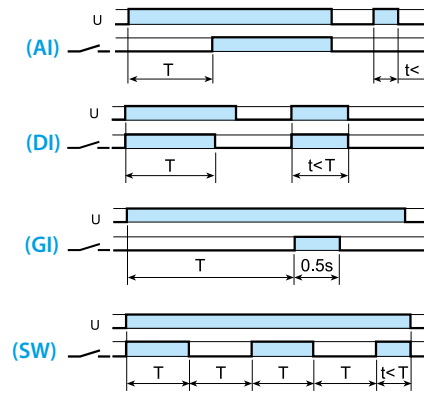



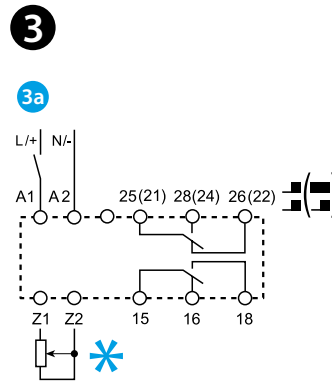

83.02

	<b>83.02.0.240.0000</b> U <sub>N</sub> (24...240)V AC (50/60 Hz) / DC U <sub>min</sub> 16.8 V AC / DC U <sub>max</sub> 265 V AC / DC P < 2 VA / < 2 W
	2 CO (DPDT) 12 A 250 V AC  AC1 3000 VA AC15 (230 V AC) 750 VA  (230 V AC) 0.5 kW DC1 (30/110/220) V (12/0.3/0.12) A
	(-20...+60)°C
IP20	



LED	U <sub>N</sub>		
	-	15 - 18 25 - 28	15 - 16 25 - 26
	✓	15 - 18 25 - 28	15 - 16 25 - 26
	✓		15 - 16 25 - 26
	✓	15 - 16 25 - 28	15 - 18 25 - 28

Utility Model - IB8302001 - 10/21  
Finder S.p.A. con unico socio - 10040 ALMESE (TO) - ITALY



# ENGLISH

83.02  
MODULAR TIMER

- 1 FRONT VIEW**
- A Time scale rotary selector
  - B Time setting
  - C LED
  - D Selector: - 2 timed contacts **1a**
  - E Function rotary selector

**2 TIME SCALES**

- 3 WIRING DIAGRAM AND FUNCTIONS**  
(WARNING: the functions must be set before energising the timer)
- 3a Start via contact on power supply (A1)**

- AI On-delay
- DI Interval
- GI Pulse delayed
- SW Symmetrical flasher (starting pulse on)

- 3b Start via contact into control terminal (B1)**

- BE Off-delay with control signal
- CE On- and off-delay with control signal
- DE Interval with control signal on
- WD Watchdog (Retriggerable interval with control signal on)

- 3c Possible to control an external load, such as another relay coil or timer, connected to the signal start terminal B1**

- 3d With DC supply, positive polarity has to be connected to B1 terminal (according to EN 60204-1)**

- 3e A voltage other than the supply voltage can be applied to the Start (B1) terminal, example:**

- A1-A2 = 230 V AC
- B1-A2 = 24 V DC

\* Potentiometer 10 kΩ / ≥0.25 W; IP66 (optional accessory)

**OTHER DATA**

Minimum control impulse: 50 ms  
Recovery time: 200 ms  
35 mm rail mount (EN 60715)

**WORKING CONDITIONS**

In conformity with the European Directive on EMC 2014/30/EU, this timer has a level of immunity, against radiated and conducted disturbances, considerably higher than requirements of EN 61812-1 standard. However, devices like transformers, motors, contactors, switches and power cables may cause disturbances and even damage the timer electronic circuit. For that reason, the wiring cables must be as short as possible, and, when necessary, the timer shall be protected by an appropriate RC network, varistor or surge protector.