

Dimmers



Kitchen
light control



Bedroom
light control



Living room
light control



Lighting control
in corridors
(for hotels, offices
and hospitals)



15
SERIES

"Master + Slave" system for dimming multiple lighting loads of either single or mixed lamp technologies

Type 15.10 "Master" - accepts input from a controlling push-button and outputs a dimming signal to a maximum of 32 x 15.11 slave dimmers, or other drivers or luminaires accepting a standardised 0-10 V/1-10 V signal

- Use with 4 wire connection
- "Soft" On and Off transitions
- Linear dimming
- Selectable operating modes with or without previous light level memory
- Staircase timer function

Type 15.11 "Slave" - accepts 1-10 V input from a 15.10 or other 0-10 V/1-10 V output device to dim a wide variety of lamps of different technology

- Selector switch for incandescent and halogen lighting loads (with or without transformer or electronic driver)
- Compatible with energy saving dimmable CFL or LED lamps and with all types of electromagnetic transformers
- Thermal protection against overload, thermofuse for extreme or short-circuit protection

15.10/15.11
Box clamp



* Maximum peak current of the contact
30 A 230 V AC. Use a contactor or power relay to switch loads exceeding this value
For outline drawing see page 18

"Master Dimmer" output specifications

Driving signal (Output mode automatically configures to match input mode of the connected Driver)

Contact configuration

A

"Slave Dimmer" output specifications

Power max.

W

Power min.

W

Nominal lamp ratings:

230 V incandescent or halogen W

Toroidal electromagnetic transformers
for LV halogen W

E-core electromagnetic transformers
for LV halogen W

Electronic transformers (or ballasts)
for LV halogen W

Dimmable compact fluorescent (CFL) W

230 V Dimmable LED Lamp W

230 V LED Strip W

Dimmable electronic transformers
for LV LED W

Supply specification

Nominal voltage (U_N)

V AC (50/60 Hz)

Operating range

Stand-by power consumption

W

Dimming operating modes

Technical data

Dimming speed (total dimming time)

s

Delay setting (staircase function)

min

Max no. of illuminated push-button (≤ 1 mA)

Ambient temperature range

°C

Protection category

IP 20

Approvals (according to type)

**Note**

(1) Select "trailing edge" () position on the front selector.

(2) Select "transformer" () position on the front selector. Preferably, no more than 2 transformers.

(3) Select "leading edge" () position on the front selector, and set the appropriate minimum dimming value (dependent on lamp type).

(4) With lamp load > 300 W (> 75 W for CFL or LED lamps), adequate ventilation must be provided - a gap of 9 mm on both side of the dimmer is suggested. Use the plastic separator type 022.09.

15.10**15.11****"Master" dimmer**

- 0-10 V/1-10 V output to drive up to 32 x 15.11 slave dimmers or other similar devices
- Multi-function (with or without memory, including special "CFL with memory" function)
- Linear dimming
- Dimming speed setting
- Staircase timer function, with switch-off "early warning" signalled by lamps dimming
- 230 V AC supply, 50/60 Hz with automatic adjustment for frequency
- 6 A output relay contact*
- 17.5 mm wide, modular, 35 mm rail mount

"Slave" dimmer

- 1-10 V input, driven by 15.10 or by other 0-10 V/1-10 V output devices
- Maximum lamp load 400 W
- 100 W load with energy saving dimmable lamps (LED and CFL)
- Leading and trailing edge dimming methods
- "Transformer" function (for use with electromagnetic transformers)
- Minimum dimming level setting
- 17.5 mm wide, modular, 35 mm rail mount

0-10 V, +35 mA max
(Active current sourcing mode)

—

1-10 V, -35 mA max
(Passive current sinking mode)

—

1 NO (6 A/230 V AC)*

—

—

400

—

3

—

400⁽¹⁾

—

400⁽²⁾

—

400⁽²⁾

—

400⁽¹⁾

—

100⁽³⁾

—

100^{(3) or (1)}

—

360⁽¹⁾

—

100⁽¹⁾

Electronic dimmers for lamps of various technologies. All compatible with the direct drive of Incandescent/halogen lamps and 230 V dimmable LED lamps

(Other lamps/drivers according to Type)

Type 15.91

- Mountable in wall box
- Leading edge dimming
- Linear dimming
- Automatically adjusts for supply frequency

Type 15.51

- Wall box or panel mount
- Trailing edge dimming
- Step or linear dimming
- Separate models for 50 and 60 Hz

Type 15.81

- 35 mm rail mount
- Leading or trailing edge dimming
- Also compatible with energy saving (CFL or LED) dimmable lamps and with most types of transformer/ballast drivers
- Linear dimming
- Automatically adjusts for supply frequency
- Thermo-fuse for extreme protection
- All Types suitable for incandescent and halogen lighting loads
- Use with 3 or 4 wire connection
- "Soft" On and Off transitions
- Two selectable operating modes: with or without previous light level memory
- Thermal protection against overload

15.91/15.51/15.81
Box clamp



For outline drawing see page 18

Output data

| | | | | |
|--|------|-------------------|--------------------|--------------------|
| Rated voltage | V AC | 230 | 230 | 230 |
| Power max. | W | 100 | 400 | 500 |
| Power min. | W | 3 | 10 | 3 |
| Nominal lamp ratings: | | | | |
| 230 V incandescent or halogen W | | 100 | 400 | 500 ⁽¹⁾ |
| Toroidal electromagnetic transformers for LV halogen W | | — | 300 ⁽²⁾ | 500 ⁽³⁾ |
| E-core electromagnetic transformers for LV halogen W | | — | — | 500 ⁽³⁾ |
| Electronic transformers (or ballasts) for LV halogen W | | — | 400 ⁽⁴⁾ | 500 ⁽¹⁾ |
| Dimmable compact fluorescent (CFL) W | | — | — | 100 ⁽⁵⁾ |
| 230 V Dimmable LED Lamp W | | 50 ⁽⁶⁾ | 50 ⁽⁷⁾ | 100 ⁽⁵⁾ |
| 230 V LED Strip W | | — | — | 450 ⁽¹⁾ |
| Dimmable electronic transformers for LV LED W | | 50 ⁽⁶⁾ | 50 ⁽⁷⁾ | 100 ⁽¹⁾ |

Supply specification

| | | | | |
|-----------------------------------|-----------------|---------------------------|---------------------------|--|
| Nominal voltage (U _N) | V AC (50/60 Hz) | 230 | 230 ⁽⁸⁾ | 230 |
| Operating range | | (0.8...1.1)U _N | (0.8...1.1)U _N | (0.8...1.1)U _N |
| Stand-by power consumption | W | 0.4 | 0.7 | 0.5 |
| Dimming operating mode | | Leading edge | Trailing edge | Trailing edge () Leading edge () and () |

Technical data

| | | | | |
|---------------------------|----|--------------------------|--------------------------|---------------------------|
| Ambient temperature range | °C | -10...+50 ⁽⁹⁾ | -10...+50 ⁽⁹⁾ | -10...+50 ⁽¹⁰⁾ |
| Protection category | | IP 20 | IP 20 | IP 20 |

Approvals (according to type)



- Note**
- (1) Select "incandescent lamp" () position on the front selector.
 - (2) One transformer only. Power-up only with the lamp load connected.
 - (3) Select "transformer" () position on the front selector. Preferably, no more than 2 transformers.
 - (4) One transformer only.
 - (5) Select "CFL" () position on the front selector, and set the appropriate minimum dimming value (dependent on lamp type).
 - (6) Only if lamps or electronic transformers are compatible with leading edge method.
 - (7) Only if lamps or electronic transformers are compatible with trailing edge method.
 - (8) Specific 60 Hz version available (see ordering information).
 - (9) It is not recommended to mount more than one dimmer in the same wall box, unless adequate ventilation is provided or the lamp load is less than 100 W (15.51) or 50 W (15.91).
 - (10) With lamp load > 300 W (> 75 W for CFL or LED lamps), adequate ventilation must be provided - a gap of 9 mm on both side of the dimmer is suggested. Use the plastic separator type 022.09.

Not compatible with illuminated push-buttons.

15.91



- Suitable for residential wall box mounting
- Maximum lamp load 100 W
- Leading edge dimming
- 2 modes - with or without memory
- 230 V AC supply, 50/60 Hz (with automatic adjustment for frequency)
- Linear dimming

15.51



- Suitable for wall box or panel mounting
- Maximum lamp load 400 W
- Trailing edge dimming
- Step or Linear dimming
- 2 modes - with or without memory
- 230 V AC supply (separate models for 50 and 60 Hz)

15.81



- 17.5 mm modular, 35 mm rail mount
- Maximum lamp load 500 W
- Multi-function
- Leading and trailing edge dimming methods (depending on the function)
- Compatible with energy saving (CFL or LED) dimmable lamps and most types of transformer/ballast drivers
- 230 V AC supply, 50/60 Hz (with automatic adjustment for frequency)

YESLY Bluetooth Dimmers 230 V

Type 15.21.8.230.B300

- Round wall box (ie: Ø 60mm) mounting

Type 15.71

- Wall mounting, compatible with most common Italian residential switch boxes: AVE, BTicino, Gewiss, Simon-Urmet, Vimar
- 7 functions, dependent on the load type
- Functions with or without memory
- Dimming operating mode Trailing edge or Leading edge
- Linear/exponential regulation
- Suitable for dimmable LED lamps, dimmable CFL lamps, halogen lamps, transformers or electronic power supplies
- Transmission range: approximately 10 m in free space and without obstacles
- "Soft" switching ON/OFF
- Over-temperature and short-circuit protection

Universal electronic dimmer 230 V

Type 15.21.8.230.0200

- Round wall box (ie: Ø 60mm) mounting
- Dimming operating mode Trailing edge or Leading edge
- "Soft" switching ON/OFF
- Over-temperature and short-circuit protection

15.21/15.71
Box clamp



For outline drawing see page 18

| Output data | | | | |
|--|-----------------|------------------------------|------------------------------|------------------------------|
| Rated voltage | V AC | 230 | 230 | 230 |
| Power max. | W | 300 | 200 | 200 |
| Power min. | W | 3 | 3 | 3 |
| Nominal lamp ratings: | | | | |
| 230 V incandescent or halogen W | | 300 | 200 | 200 |
| Toroidal electromagnetic transformers for LV halogen W | | 300 | — | 200 |
| E-core electromagnetic transformers for LV halogen W | | 300 | — | 200 |
| Electronic transformers (or ballasts) for LV halogen W | | 300 | 200 | 200 |
| Dimmable compact fluorescent (CFL) W | | 150 | — | 100 |
| 230 V Dimmable LED Lamp W | | 150 | 200 | 100 |
| 230 V LED Strip W | | 270 ⁽¹⁾ | 180 | 180 ⁽¹⁾ |
| Dimmable electronic transformers for LV LED W | | 300 | 200 | 200 |
| Supply specification | | | | |
| Nominal voltage (U _N) | V AC (50/60 Hz) | 230 | 230 | 230 |
| Operating range | | (0.8...1.1) U _N | (0.8...1.1) U _N | (0.8...1.1) U _N |
| Stand-by power consumption | W | 0.4 | 0.4 | 0.4 |
| Technical data | | | | |
| Dimming operating mode | | Trailing edge / Leading edge | Trailing edge / Leading edge | Trailing edge / Leading edge |
| Ambient temperature range | °C | -10...+50 | -10...+45 | -10...+50 |
| Protection category | | IP 20 | IP 20 | IP 20 |
| Approvals (according to type) | | | | |

Note ⁽¹⁾ Select "Trailing edge" dimming operating mode from the application.

NEW 15.21.8.230.B300

YESLY



- Transmission protocol Bluetooth Low Energy (BLE)
- 128 bit encrypted connection
- Configurable via Finder YOU app - compatible with iOS and Android operating systems
- Can be controlled through standard push-buttons, BEYON or 013.B9 wireless push-buttons
- Maximum dimmable power 300 W
- Status LED

NEW 15.21.8.230.0200



- Dimming operating mode Trailing edge or Leading edge
- No BLE interface
- Suitable for LED loads
- Maximum dimmable power 200 W LED
- Without memory

NEW 15.71

YESLY



- Transmission protocol Bluetooth Low Energy (BLE)
- 128 bit encrypted connection
- Configurable via Finder YOU app - compatible with iOS and Android operating systems
- Can be controlled through standard push-buttons, BEYON or 013.B9 wireless push-buttons
- Maximum dimmable power 200 W
- Status LED

**YESLY Bluetooth dimmer with PWM
for LED strips**
Type 15.21.9.024.B200

- Round wall box (ie: Ø 60 mm) mounting
- LED strip
- "Soft" switching ON/OFF
- Protected against short-circuit, overload and reverse polarity
- Three PWM operating frequencies (selectable) - to counter "strobe" effect with camera

15.21
Box clamp


NEW 15.21.9.024.B200
YESLY


- Transmission protocol Bluetooth Low Energy (BLE)
- 128 bit encrypted connection
- Configurable via Finder YOU app - compatible with iOS and Android operating systems
- Can be controlled through standard push-buttons, BEYON or 013.B9 wireless push-buttons
- Maximum dimmable power 192 W
- Three PWM operating frequencies (selectable) - to counter "strobe" effect with camera

For outline drawing see page 18

Output data

| | | |
|------------------------|--------|---------|
| Rated voltage | V DC | 12...24 |
| Maximum current | A | 8 |
| Maximum dimmable power | | |
| LED strips | 24 V W | 192 |
| | 12 V W | 96 |

Supply specification


| | | |
|-----------------------------------|------|---------|
| Nominal voltage (U _N) | V DC | 12...24 |
| Operating range | | — |
| Stand-by power consumption | W | — |

Technical data

| | | |
|---------------------------|----|-----------|
| Dimming operating mode | | PWM |
| Ambient temperature range | °C | -10...+50 |
| Protection category | | IP 20 |


Approvals (according to type)


- KNX Universal Dimmer with 2 channels**
- 2 x 400W channels
 - LED indicators for each channel
 - Thermal protection and short-circuit protection
 - Manual override through front panel
 - Scenario Management
 - Power supply via KNX bus
 - 35 mm rail (EN 60715) mounting
 - Suitable for ETS 4 (or latest versions)



- Dimming operating modes: Leading Edge or Trailing Edge, ETS configurable
- Suitable for many kind of loads: LED lamps, halogen, CFL, electronic and electromagnetic transformers

For outline drawing see page 18

| Output data | | |
|---|---|----------|
| Rated voltage | V AC | 230 |
| Power max. | W | 400 |
| Power min. | W | 2 |
| Nominal lamp ratings 230 V: | | |
| 230 V incandescent or halogen W | | 400 |
| Toroidal electromagnetic transformers for LV halogen W | | 400 |
| E-core electromagnetic transformers for LV halogen W | | 400 |
| Electronic transformers (or ballasts) for LV halogen W | | 400 |
| Dimmable compact fluorescent (CFL) W | | 100 |
| Dimmable 230 V LED W | | 100 |
| Dimmable electronic transformers for LV LED W | | 100 |
| Dimming operating modes | Leading Edge / Trailing Edge | |
| Supply specification | | |
| Type of BUS | | KNX |
| Supply voltage | V DC | 30 |
| Rated consumption | mA | 7 |
| Technical data | | |
| Ambient temperature range | °C | -5...+45 |
| Protection category | | IP 20 |
| Approvals (according to type) |  | |

Ordering information


Example: type 15.71, YESLY Bluetooth dimmer, 230 V AC.

| Series | | | Transmission protocol | | | Supply voltage | | | Supply version | | | AC input frequency | | | Output power | | |
|--|---|---|---|---|---|---|---|---|--|---|---|--|---|---|---|---|---|
| 1 | 5 | 7 | 1 | 8 | 2 | 3 | 0 | B | 2 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| Type 1 = Master / slave, 35 mm rail (EN 60715) mount, 17.5 mm wide 2 = Round wall box mounting 2 = Mounting on 35 mm rail (EN 60715), with 2 outputs (15.2K) 5 = Panel or wall box mount 7 = YESLY - wall mounting residential switch boxes like AVE, Bticino, Gewiss, Simon-Urmet, Vimar 8 = 35 mm rail (EN 60715) mount, 17.5 mm wide, for energy saving lamps 9 = Wall box mount, for LED lamps | | | Supply voltage 230 = 230 V 230 = 110...230 V (only for 15.10) 024 = 12...24 V | | | Supply version 8 = AC 9 = DC | | | AC input frequency 0 = 50 Hz (15.51) 50/60 Hz (15.11/21/71/81/91) DC (15.21.9.024.B200) 1 = 50/60 Hz (15.10) 6 = 60 Hz (15.51) | | | Output power 0 = 100 W (15.91) 2 = 200 W (15.21, 5.71) 3 = 300 W (15.21) 4 = 400 W (15.51, 15.11, 15.2K) 5 = 500 W (15.81) | | | No. of poles 0 = 0-10 V output (only for 15.10) 1 = 1 output K = KNX interface dimmer | | |

Available Codes




15.10.8.230.0010 master dimmer, 50/60 Hz
 15.11.8.230.0400 slave dimmer, 50/60 Hz
 15.21.8.230.B300 YESLY BLE Dimmer - 300 W, white
 15.21.8.230.0200 Universal Dimmer
 15.21.9.024.B200 YESLY BLE Dimmer PWM
 15.51.8.230.0400 step dimming, 50 Hz
 15.51.8.230.0404 linear dimming, 50 Hz
 15.51.8.230.0460 step dimming, 60 Hz
 15.71.8.230.B200 YESLY BLE Dimmer - 200 W, white
 15.71.8.230.B202 YESLY BLE Dimmer - 200 W, anthracite gray
 15.81.8.230.0500 linear dimming, 50/60 Hz
 15.91.8.230.0000 linear dimming, 50/60 Hz
 15.2K.8.230.0400 KNX universal Dimmer





Technical data

| EMC specifications | | | | | | | | | | | | | | | | | | | | |
|--|-------------------|---|--|--|---------------------------------------|--|--------------------|-----------|----------------------|--|--------------------|---|--------------------|--|--------------------|--|-------|--|---|--|
| Type of test | | | Reference standard | | 15.51/15.91 | | 15.10/11/81 | | 15.21.8.230.0200 | | 15.2K | | | | | | | | | |
| Electrostatic discharge | contact discharge | | EN 61000-4-2 | | 4 kV | | | 4 kV | | | 4 kV | | | | | | | | | |
| | air discharge | | EN 61000-4-2 | | 8 kV | | | 8 kV | | | 8 kV | | | | | | | | | |
| Radiated electromagnetic field | | (80...1000 MHz) | EN 61000-4-3 | | 3 V/m | | 10 V/m | | 10 V/m | | 3 V/m | | | | | | | | | |
| Fast transients (burst) | | on supply terminals | EN 61000-4-4 | | 4 kV | | | 4 kV | | | 4 kV | | | | | | | | | |
| (5-50 ns, 5 and 100 kHz) | | on push-button connection | EN 61000-4-4 | | 4 kV | | | 4 kV | | | — | | | | | | | | | |
| Voltage pulses on supply terminals (surge 1.2/50 µs) | | differential mode | EN 61000-4-5 | | 2 kV | | | 2 kV | | | 2.5 kV | | | | | | | | | |
| Radiofrequency common | | on supply terminals | EN 61000-4-6 | | 3 V | | | 10 V | | | 3 V | | | | | | | | | |
| mode voltage (0.15...80 MHz) | | on push-button connection | EN 61000-4-6 | | 3 V | | | 10 V | | | — | | | | | | | | | |
| Voltage dips | | 70% U _N , 40% U _N | EN 61000-4-11 | | 10 cycles | | | 10 cycles | | | 10 cycles | | | | | | | | | |
| Short interruptions | | | EN 61000-4-11 | | 10 cycles | | | 10 cycles | | | 10 cycles | | | | | | | | | |
| Radiofrequency conducted emissions | | 0.15...30 MHz | EN 55015 | | class B | | | class B | | | class B | | | | | | | | | |
| Radiated emissions | | 30...1000 MHz | EN 55015 | | class B | | | class B | | | class B | | | | | | | | | |
| EMC specifications YESLY | | | | | 15.21.8.230.B300/15.71 | | | | 15.21.9.024.B200 | | | | | | | | | | | |
| Electrostatic discharge | contact discharge | | EN 61000-4-2 | | 4 kV | | | 4 kV | | | | | | | | | | | | |
| | air discharge | | EN 61000-4-2 | | 8 kV | | | 8 kV | | | | | | | | | | | | |
| Radiated electromagnetic field | | (80...1000 MHz) | EN 61000-4-3 | | 10 V/m | | | 10 V/m | | | | | | | | | | | | |
| Fast transients (burst) | | on supply terminals | EN 61000-4-4 | | 2 kV | | | 2 kV | | | | | | | | | | | | |
| (5-50 ns, 5 and 100 kHz) | | on push-button connection | EN 61000-4-4 | | 4 kV | | | 1 kV | | | | | | | | | | | | |
| Voltage pulses on supply terminals (surge 1.2/50 µs) | | differential mode | EN 61000-4-5 | | 2 kV | | | 1 kV | | | | | | | | | | | | |
| Radiofrequency common | | on supply terminals | EN 61000-4-6 | | 10 V | | | 10 V | | | | | | | | | | | | |
| mode voltage (0.15...80 MHz) | | on push-button connection | EN 61000-4-6 | | 10 V | | | 10 V | | | | | | | | | | | | |
| Voltage dips | | 70% U _N , 40% U _N | EN 61000-4-11 | | 10 cycles | | | 10 cycles | | | | | | | | | | | | |
| Short interruptions | | | EN 61000-4-11 | | 10 cycles | | | 10 cycles | | | | | | | | | | | | |
| Radiofrequency conducted emissions | | 0.15...30 MHz | EN 55015 / ETSI EN 301489-1/ ETSI EN 301489-17 | | class B | | | class B | | | | | | | | | | | | |
| Radiated emissions | | 30...6000 MHz | EN 55015 / ETSI EN 301489-1/ ETSI EN 301489-17 | | class B | | | class B | | | | | | | | | | | | |
| Terminals | | | 15.10/15.11/15.51/15.71/ 15.81/15.91 | | | | 15.21 | | 15.2K | | | | | | | | | | | |
| Max. wire size | | | solid cable | | stranded cable | | solid cable | | stranded cable | | solid cable | | stranded cable | | | | | | | |
| | | | mm² | | 1 x 6 / 2 x 4 | | 1 x 4 / 2 x 2.5 | | 1 x 2.5 / 2 x 1.5 | | 1 x 2.5 / 2 x 1 | | 1 x 6 / 2 x 2.5 | | 1 x 4 / 2 x 1.5 | | | | | |
| | | | AWG | | 1 x 10 / 2 x 12 | | 1 x 12 / 2 x 14 | | 1 x 14 / 2 x 16 | | 1 x 14 / 2 x 16 | | 1 x 10 / 2 x 14 | | 1 x 12 / 2 x 16 | | | | | |
|  Screw torque | | | Nm | | 0.8 | | | 0.5 | | | 0.5 | | | | | | | | | |
| Wire strip length | | | mm | | 9 | | | | | | | 7 | | | | | | | | |
| Other data | | | 15.10 | | 15.11 | | 15.21 | | 15.51 | | 15.71 | | 15.81 | | 15.91 | | 15.2K | | | |
| Power lost to the environment | | without load | W | | 0.5 | | 0.5 | | 0.4 | | 0.7 | | 0.4 | | 0.5 | | 0.4 | | — | |
| | | with rated load | W | | 1.7 | | 2.5 | | 2.5 | | 2.2 | | 2 | | 2.6 | | 1.2 | | — | |
| Max cable length for push-button connection | | | m | | 100 | | 100 | | 100 | | 100 | | 100 | | 100 | | 100 | | — | |
| Max cable length for Master and Slaves connection | | | m | | 100 (keep separate from power cables) | | | | | | | | | | | | | | | |

Types 15.10 and 15.11





Signaling

| LED (15.10 only) | Condition |
|---|--------------------------------|
|  | Stand-by, output voltage < 1 V |
|  | Active, output voltage ≥ 1 V |
|  | Timing, staircase function |







| LED (15.11 only) | Condition |
|--|--|
|  | Stand-by, input voltage < 1 V |
|  | Active, input voltage ≥ 1 V |
|  | Short circuit or overload, output disabled |
|  | Overtemperature, output disabled |

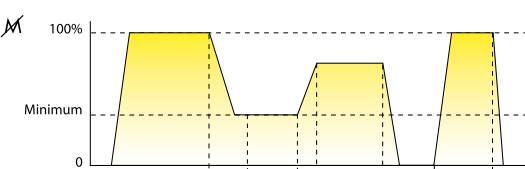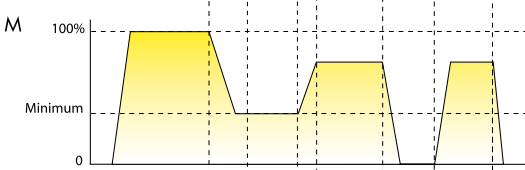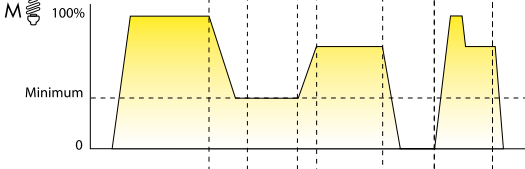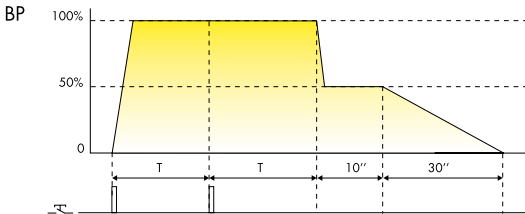Functions

Type Linear dimming

| | | |
|-------|---|--|
| 15.10 |  | <p>Operating mode without memory: at switch-off, the light level is not memorized.</p> <p>Long control pulse: The light level is progressively raised or lowered in linear way. The lowest value depending on the "minimum dimming level" regulator setting (on 15.11).</p> <p>Short control pulse: Alternately switches between On and Off (maximum light level and the off state).</p> |
| |  | <p>Operating mode with memory: the previous light level is memorized.</p> <p>Long control pulse: The light level is progressively raised or lowered in linear way. The lowest value dependent on the "minimum dimming level" regulator setting (on 15.11).</p> <p>Short control pulse: Alternately switches between On and Off. When switching On, the light level assumes the value set during the previous On state.</p> |
| |  | <p>Operating mode with memory: the previous light level is memorized, specific for CFL Lamp.</p> <p>Long control pulse: The light level is progressively raised or lowered in linear way. The lowest value dependent on the "minimum dimming level" regulator setting (on 15.11).</p> <p>Short control pulse: Alternately switches between On and Off. When switching On, the light level reach the full value for a very short time (in order to guarantee the correct lamp turn-on), then immediately assumes the value set during the previous On state.</p> |
| |  | <p>Staircase relay with early warning On initial impulse the output closes and the timing starts for the pre-set duration. After the timing period (T), the output power is reduced to 50% for 10 seconds; then in the last 30 seconds it will be further reduced to the final shutdown. During the pre-set and 40 seconds warning time, it is possible, by a further impulse, to extend the time by the full pre-set value.</p> |

Type of load - Type 15.11

| Type of load | Selector setting | Regulator setting |
|--|--|---|
| <ul style="list-style-type: none"> Incandescent lamps 230 V halogen lamps 12/24 V halogen and LED lamps with electronic transformer/ballast |  (Trailing Edge) | <p>It is suggested to set the "minimum dimming level" at the lowest value, so that the complete dimming range is available. But if it is necessary to avoid too low a level of illumination, a higher value can be set.</p>  |
| <ul style="list-style-type: none"> Dimmable compact fluorescent lamps (CFL) Dimmable LED lamps |  (Leading Edge) | <p>It is suggested to initially set the "minimum dimming level" at an intermediate value and then if necessary, readjust for a level found to be compatible with the lamp being used.</p>  |
| <ul style="list-style-type: none"> 12/24 V halogen lamps with toroidal or E-core electromagnetic transformer |  (Leading Edge) | <p>It is suggested to set the "minimum dimming level" at the lowest value, so that the complete dimming range is available. But if it is necessary to avoid too low a level of illumination, a higher value can be set.</p>  |


Type 15.51 and 15.91

Functions

Type

Step dimming

Operating mode 1 (with memory): the previous light level is memorized.

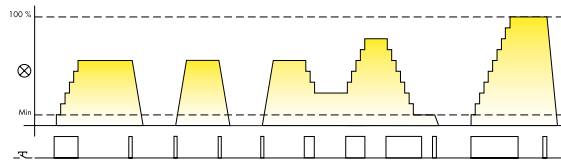


Long control pulse: The light level is progressively raised or lowered through a maximum of 10 incremental steps.

Short control pulse: Alternately switches between On and Off. When switching On, the light level assumes the value set during the previous On state.

15.51...0400

Operating mode 2 (without memory): on switch off, the light level is not memorized.

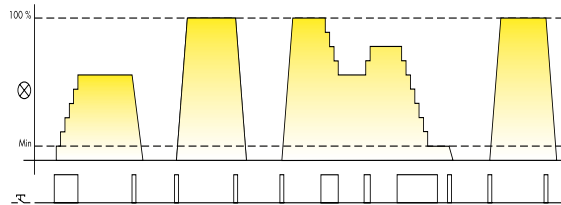


Long control pulse: The light level is progressively raised or lowered through a maximum of 10 incremental steps.

Short control pulse: Alternately switches On or Off between the maximum light level and the off state.

Type

Linear dimming

Operating mode 3 (with memory): the previous light level is memorized.

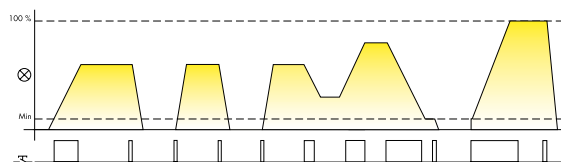


Long control pulse: The light level is progressively raised or lowered.

Short control pulse: Alternately switches between On and Off. When switching On, the light level assumes the value set during the previous On state.

15.51...0404

15.91...0000

Operating mode 4 (without memory): on switch off, the light level is not memorized.

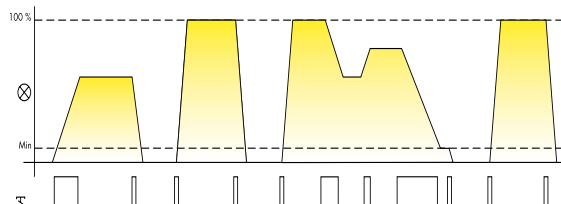

Long control pulse: The light level is progressively raised or Lowered.

Short control pulse: Alternately switches On or Off between the maximum light level and the off state.

Operating mode setup

Type 15.51

On 15.51 operating mode 1 or 3 (with memory) is preset, but it is possible to change it using the following sequence:

- remove the supply voltage;
 - press the control button;
 - apply the supply to the relay, keeping the button closed for 3 second;
 - on button release, the light will flash twice to indicate the selection of operating mode 2 or 4, or flash once for operating mode 1 or 3.
- Repeating the above steps will alternately change between operating modes.

Type 15.91

On 15.91 operating mode 4 (without memory) is preset, but it is possible to change it using the following sequence:

- remove the supply voltage;
 - press the control button;
 - apply the supply to the relay, keeping the button closed for 3 second;
 - on button release, the light will flash twice to indicate the selection of operating mode 3, or flash once for operating mode 4.
- Repeating the above steps will alternately change between operating modes.

Type 15.21.8.230.0200

The dimmer is pre-set for "Trailing edge" dimming, but it is possible to set "Leading edge" using the following sequence:

- disconnect the power supply;
- press and hold down a push-button;
- restore power while holding down the button until the lamp produces one or two flashes and, at this point, release the button. If 2 flashes are emitted the new set method will be Leading Edge, if only one flash is emitted the method will be Trailing Edge

Type 15.81

Thermal protection and signaling

| LED (15.81 type only) | Supply voltage | Thermal protection |
|-----------------------|----------------|--------------------|
| | OFF | — |
| | ON | — |
| | ON | ALARM |


ALARM

The internal thermal protection (active on all dimmer types) will detect an unsafe temperature, due to overload or incorrect installation, and will turn the dimmer output off.

It is possible to turn the dimmer on, by push-button, only when the temperature reduces to a safe level (after 1 to 10 minutes, depending on installation conditions) and after removing the cause of the overload.

Functions

Type Linear dimming

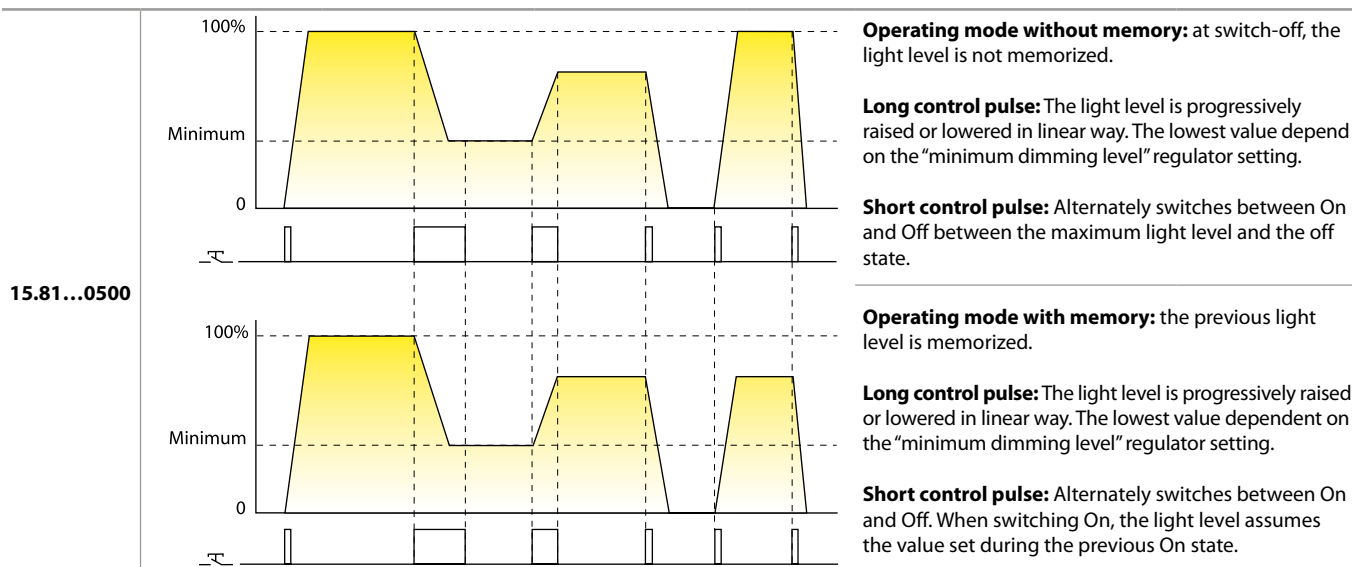


| Type of load | Selector setting | | Regulator setting |
|--|------------------|--------------------|--|
| | With memory (M) | Without memory (M) | |
| <ul style="list-style-type: none"> Incandescent lamps 230 V halogen lamps 12/24 V halogen lamps with electronic transformer/ballast | | | It is suggested to set the "minimum dimming level" at the lowest value, so that the complete dimming range is available. But if it is necessary to avoid too low a level of illumination, a higher value can be set. |
| <ul style="list-style-type: none"> Dimmable compact fluorescent lamps (CFL) Dimmable LED lamps | | | It is suggested to initially set the "minimum dimming level" at an intermediate value and then if necessary, readjust for a level found to be compatible with the lamp being used. |
| <ul style="list-style-type: none"> 12/24 V halogen lamps with toroidal or E-core electromagnetic transformer | | | It is suggested to set the "minimum dimming level" at the lowest value, so that the complete dimming range is available. But if it is necessary to avoid too low a level of illumination, a higher value can be set. |


Dimming methods

Phase cutting:

Leading edge dimming

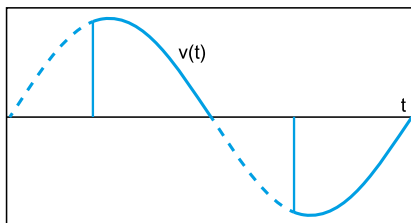

Trailing edge dimming

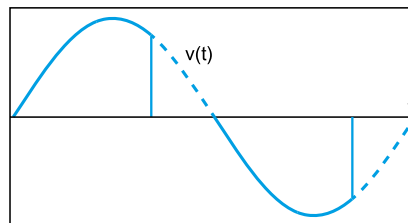


Light dimming is realized with "phase cutting technology", which works by "cutting off" part of the mains voltage waveform in order to reduce the RMS voltage fed to the lamp. When the "cut off" part is at the beginning of each half cycle the dimming method is called Leading Edge. When it is towards the end of each half cycle, it is called Trailing Edge. These 2 methods are suitable for dimming different lamp types: Trailing Edge is, in general, more suitable for electronic transformers for low voltage lamps (halogen or LED). Leading Edge is better suited for electromagnetic transformers for LV lamps, 230 V CFL and 230 V LED lamps. Both methods are, however, suitable for dimming 230 V halogen and incandescent lamps. In consideration of the different lamp types actually available on the market, it is suggested to refer to the technical specification indicated in page 3 and, if given, to the lamp manufacturer's recommendation.


PWM:

"Pulse Width Modulation" regulates electrical power by modulating the width of the ON time relative to the OFF time. The higher the duty cycle, the greater the power applied to the load. PWM is exclusively for direct current and is used particularly for the dimming of DC LED strips. In this case, the dimmer is positioned downstream of the power supply.

Duty Cycle 10 %

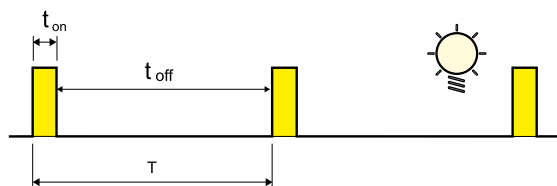

Duty Cycle 90 %

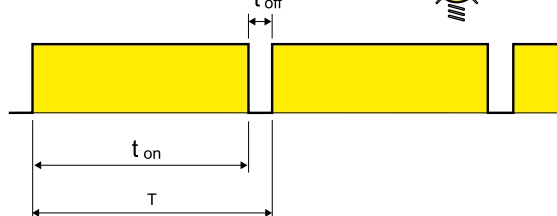

Types 15.21 and 15.71 (BLE only)









Dimmer setting

The dimming function can be set via Finder YOU app, available for iOS and Android systems.

This product is ready-to-use with the factory setting: 1 – LEDRC1; Trailing edge linear control curve.

Functions

Settable via app.

| Load type | Function | Driving method | Control curve |
|---|------------------|------------------|--|
| LED lamps, Halogen, electronic transformers LED   | 1 | TE Trailing Edge | Linear  |
| | 2 | LE Leading Edge | |
| LED LED | 3 | TE Trailing Edge | Exponential  |
| | 4 | LE Leading Edge | |
| CFL lamps  | 5 | TE Trailing Edge | Exponential  |
| | 6 | LE Leading Edge | |
| Electromechanical transformers  | 7 | LE Leading Edge | Linear  |
| AUTO | AUTOMATIC | | |

AUTO: the automatic function verifies with a special algorithm the driving method (Trailing edge or Leading edge) best suited to the applied load. If the AUTO function is selected, the dimmer carries out a check switching on the load with two working cycles each time the dimmer is powered from the L & N (even after a blackout). These cycles allow the dimmer to set the right driving method.

Control curve: the Linear or Exponential control curve is useful in achieving the most visually appealing change in light intensity - according to the type of load being used.

Parameters

Settable via Finder YOU app.

Minimum light value: Minimum value of load intensity.

Switch time: Switching ON/OFF time.


Regulation time: Time to reach the highest or lower light value.

Scene time: Reaching the value recalled by a scenario.

Memory: Remembers the brightness value before power off.

Restore after blackout: Restoring the light intensity to the value prior to a loss of power.

Wiring diagrams - Types 15.10 and 15.11

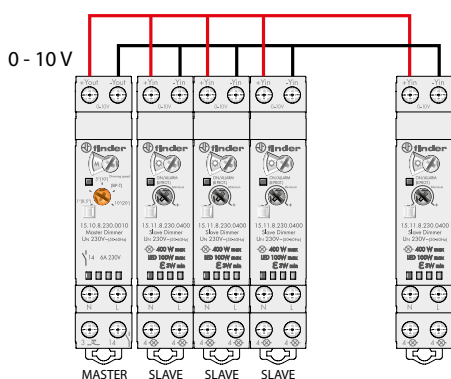

This new system is modular, adaptable to every need and allows control of multiple lamps through a single control device called the "Master Dimmer" Type 15.10.8.230.0010.


The Master Dimmer, produces a 0 - 10 V signal proportional to the dimming value needed: 0 V corresponds to 0% (light off); 5 V equals 50%, 10 V corresponds to the maximum brightness (100% on).

The 0 - 10 V output signal terminals Yout + / Yout - of the "Master Dimmer" must be connected to terminals + Yin / Yin - of one or more 15.11.8.230.0400, called the "Slave Dimmers", which have the task of changing the voltage applied to the lamps and therefore their brightness.

The result is a flexible system that offers a range of solutions from the minimum configuration of a Master Dimmer and a Slave Dimmer, up to the maximum configuration of a Master Dimmer and 32 Slave Dimmers.

Each slave can drive a different lamp type, depending on the appropriate methodology, "Leading Edge" or "Trailing Edge". It can regulate halogen lamps, dimmable LED lamps, dimmable CFL lamps, electronic transformers, and electromagnetic transformers.

For example, one Master Dimmer can control a Slave Dimmer with LED lamps and at the same time a second Slave Dimmer with halogen lamps, and a third with electronic transformers.

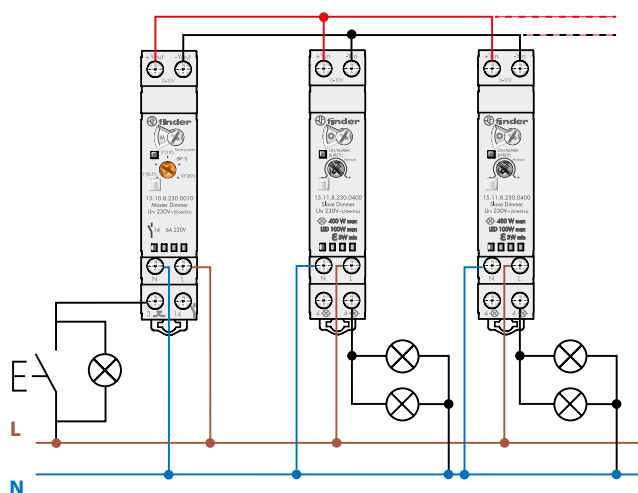


MASTER DIMMER TYPE 15.10 AND SLAVE DIMMER TYPE 15.11

It is recommended that the Master controls from one to a maximum of 32 Slave units.

The push-buttons (including illuminated push-buttons Max. 15) serve as the ON / OFF (momentary push), or when pressed for a longer time they adjust the brightness level.

Each Slave can drive a different load type.

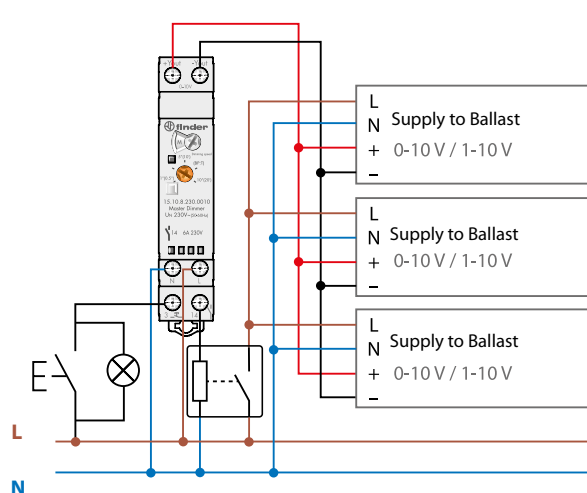


MASTER DIMMER + 0 - 10 V ELECTRONIC TRANSFORMER OR BALLAST

Using only the Master Dimmer it is possible to control electronic transformers or ballasts with a 0 - 10 V / 1 - 10 V input (observing correct polarity).

For 1 - 10 V applications it is suggested to supply the Ballast Live from terminal 14. This will ensure that the supply to the Ballast is cut-off for a signal < 1 V.

Note: Check that the maximum Peak Current of the Ballast does not exceed the 30 A 230 V AC rating of terminal 14. Use a contactor or power relay to switch loads exceeding this value.

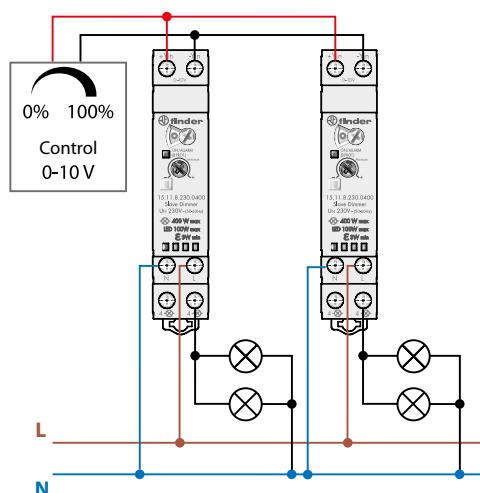


BMS 0 - 10 V OUTPUTS + SLAVE DIMMERS

In the case of Home Automation or Building Automation systems you can use just the Slave Dimmer Type 15.11 directly controlled by the 0 - 10 V output of the building management system (BMS), or by 0 - 10 V rotary regulators.


Wiring diagrams

Note: remember to maintain a ground/earth connection for class 1 light fittings.


Type 15.51 - 3 wire connection

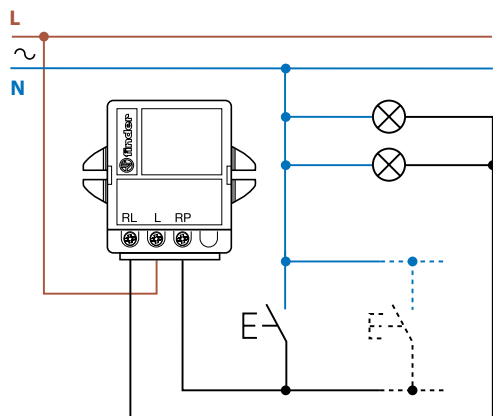


Type 15.51 - 4 wire connection

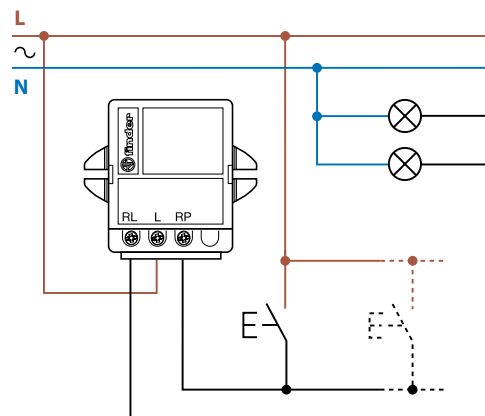


Type 15.91 - 3 wire connection

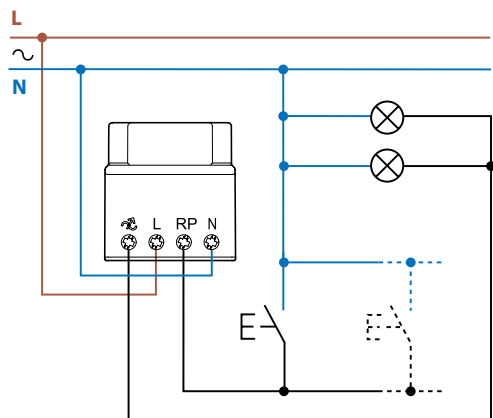


Type 15.91 - 4 wire connection

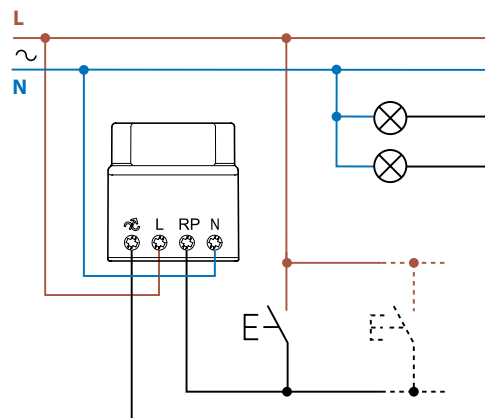


Type 15.81 - 3 wire connection

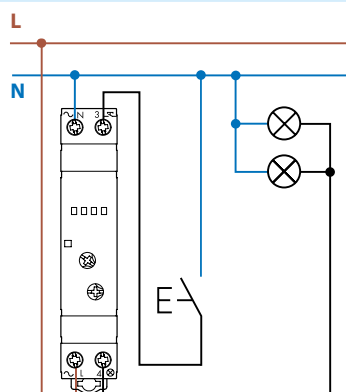

Type 15.81 - 4 wire connection

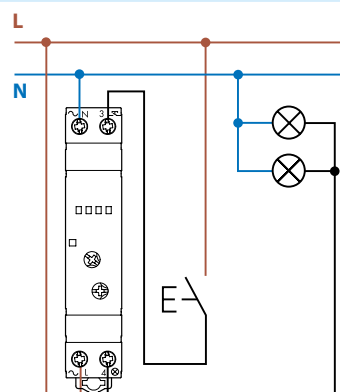


Type 15.71 - 4 wire connection

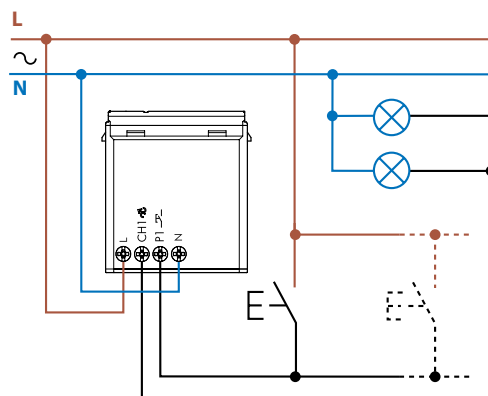


Wiring diagram


Type 15.21.8.230.xxxx - 4 wire connection

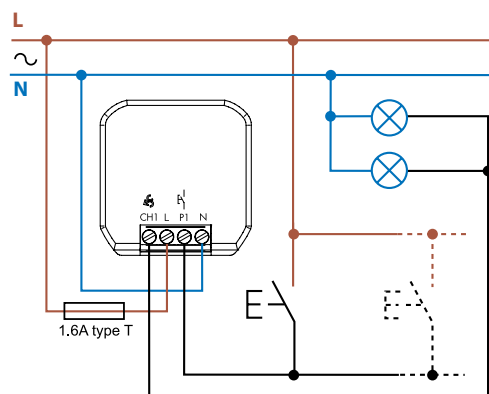





Type 15.21.9.024.B200

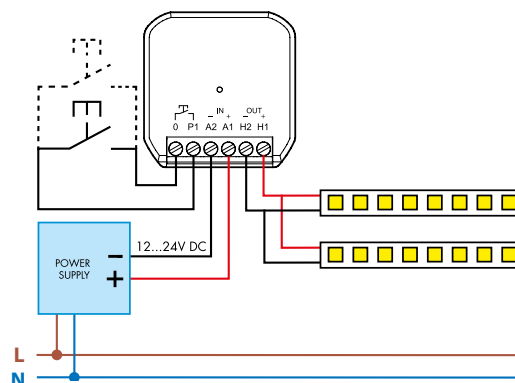






Type 15.2K

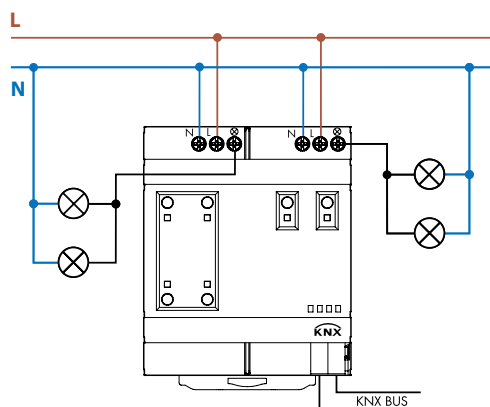

Outline drawings

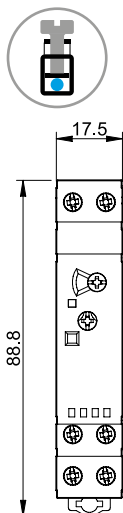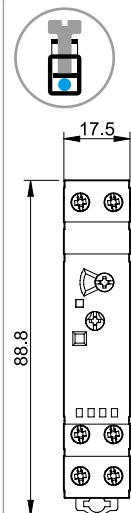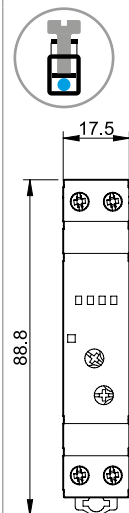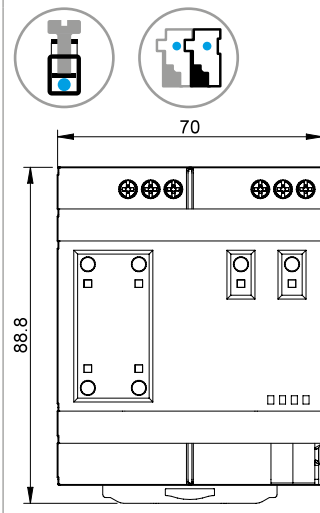Type 15.10
Box clampType 15.11
Box clampType 15.81
Box clampType 15.2K
Box clamp

KNX terminal

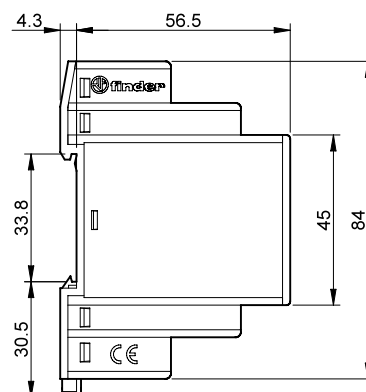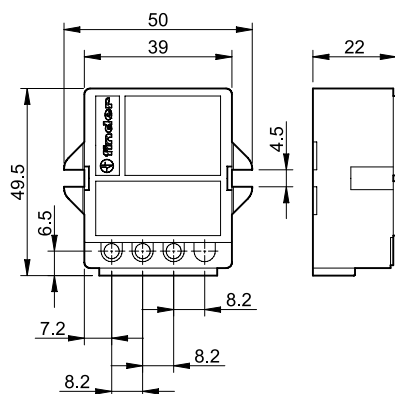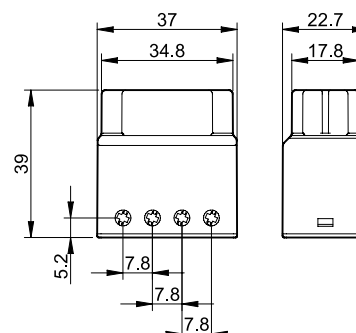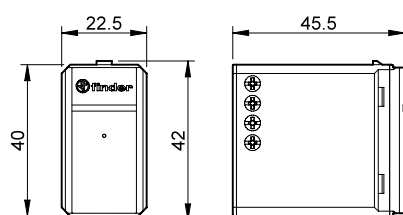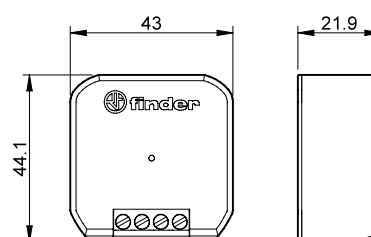Type 15.51
Box clampType 15.91
Box clampType 15.71 - YESLY
Box clampType 15.21
Box clamp


Accessories



020.01

Adaptor for panel mounting for types 15.10, 15.11 and 15.81, plastic, 17.5 mm wide



020.01



022.09

Separator for rail mounting, plastic, 9 mm wide for types 15.10, 15.11 and 15.81


022.09

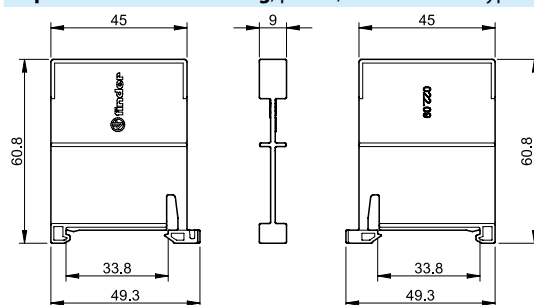

060.48

Sheet of marker tags for types 15.10, 15.11 and 15.81, plastic, 48 tags, 6 x 12 mm

060.48



022.18




8-way jumper link for type 15.10 and 15.11 connection, 17.5 mm wide

022.18 (blue)

Rated values

10 A - 250 V

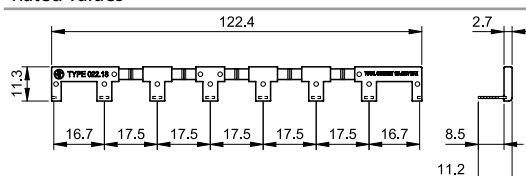


015.0.230


Leakage current suppression module.

It absorbs the leakage current on the LED lamps, when, with the Dimmer off, the lamps do not turn off completely but remain on at minimum. It absorbs 0.8 W at 230 V AC.

015.0.230



Connection example - Type 15.21

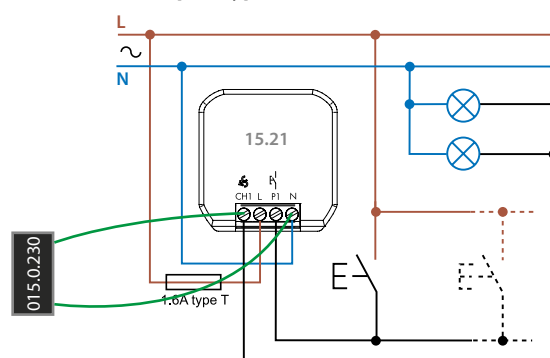


Accessories



013.00

Push-button phase/neutral converter. Use this with a pre-existing neutral wired push-button when retro fitting a device designed only for phase connected push-buttons. This avoids any radical change to the existing wiring.

013.00

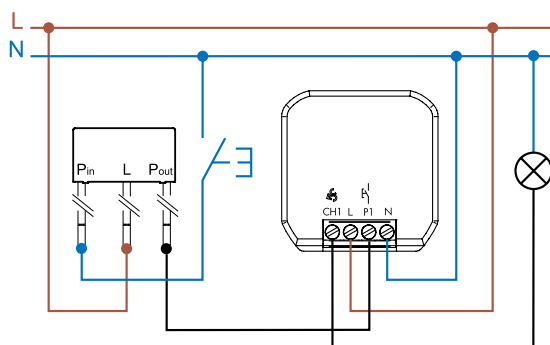

013.17

Adapter for DIN rail, to install devices 15.21 in the electrical panel.

013.17

