


REPORT







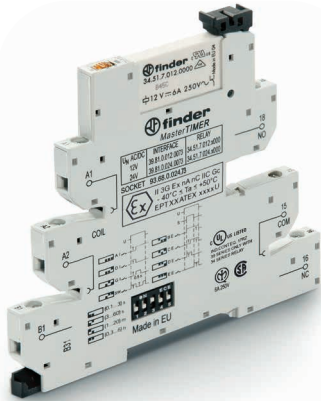

















IECEX, ATEX and HazLoc compliant components



IECEX, ATEX and HazLoc compliant relays interface, PCB relays and modular timers

Finder offers a full range of solutions with the 39 and 58 Series interface modules, 41 and 66 Series PCB and fast-on relay, and new 83 Series IECEX - Ex - HazLoc modular timer.



<p>41 Series</p> 	<ul style="list-style-type: none"> - IECEx, ATEX (II 3 G Ex nC IIC Gc) - HazLoc Class I, Zone 2, AEx nC IIC Gc - HazLoc Class I, Div. 2, Groups A, B, C, D - T4    <p>HazLoc</p>	<p>Low profile (15.7 mm height) PCB relays</p> <p>Type 41.52 - 2 Pole 8 A (5.0 mm pin pitch) 2 CO (DPDT) - 2 NO (DPST-NO)</p> <p>Type 41.61 - 1 Pole 16 A (5.0 mm pin pitch) 1 CO (SPDT) - 1 NO (SPST-NO)</p> <ul style="list-style-type: none"> - DC coils, from 5 to 110 V DC - 8 mm, 6 kV (1.2/50 µs) isolation, coil-contacts
<p>66 Series</p> 	<ul style="list-style-type: none"> - ATEX (II 3 G Ex ec nC IIC Gc) - HazLoc Class I, Div. 2, Groups A, B, C, D - T4 - T5 - T6   <p>HazLoc</p>	<p>Power relays</p> <p>Type 66.82 - 2 Pole 30 A - 2 CO (DPDT) or 2 NO (DPST-NO) - Faston 250 connections - Nominal voltage: 6 to 240 V AC or 6 to 125 V DC</p> <p>Type 66.22(S) - 2 Pole 25 A - 2 CO (DPDT) or 2 NO (DPST-NO) - PCB mount - Nominal voltage: 6 to 125 V DC</p>
<p>Type 83.02.0.240.0003</p> 	<ul style="list-style-type: none"> - IECEx, ATEX (Ex ec nC IIC T4 Gc) - HazLoc Class I, Div. 2, Groups A, B, C, D - T4 - HazLoc Class I, Zone 2, AEx ec nC IIC T4 Gc    <p>HazLoc</p>	<p>Modular timers - IECEx - ATEX - HazLoc</p> <ul style="list-style-type: none"> - 22.5 mm multi-function timer - 2 CO (DPDT) output contact - 10 A 277 V AC / 5 A 32 V DC - Multi-voltage supply: 24...240 V AC/DC - 8 functions with or with or without control signal - 0.05 s to 10 day time range - External time setting potentiometer option
<p>Type 39.1x.x.xxx.0073 Box clamp Type 39.0x.x.xxx.0073 Push-in terminal</p> 	<p>Type 39.11 - 39.01 EMR - ATEX (II 3G Ex ec nC IIC Gc) - HazLoc Class I, Div. 2, Groups A, B, C, D - T5 - T6</p> <p>Type 39.10 - 39.00 - Solid State Relay (SSR) - HazLoc Class I, Div. 2, Groups A, B, C, D - T5 - T6</p>   <p>HazLoc</p>	<p>Relay interface module</p> <ul style="list-style-type: none"> - 1 CO (SPDT) - 6 A 250 V AC / 6 A 24 V DC - Nominal voltage: 6 to 240 V AC/DC 6 to 24 V DC 230 V AC - Integral coil indication - Multivoltage version
<p>Type 39.x1.x.xxx.0073 Box clamp Type 39.x0.x.xxx.0073 Push-in terminal</p> 	<p>Type 39.81 - 39.91 - EMR - ATEX (II 3G Ex ec nC IIC Gc) - HazLoc Class I, Div. 2, Groups A, B, C, D - T5 - T6</p> <p>Type 39.80 - 39.90 - Solid State Relay (SSR) - HazLoc Class I, Div. 2, Groups A, B, C, D - T5 - T6</p>   <p>HazLoc</p>	<p>Slim timed interface module</p> <ul style="list-style-type: none"> - 1 CO (SPDT) - 6 A 250 V AC / 6 A 24 V DC - Nominal voltage: 12 and 24 V AC/DC - Timer adjustment via top mounted rotary knob with integral coil indication - accessible after assembly - Multi-function - DIP-switch for selection from: <ul style="list-style-type: none"> - 8 functions - 4 time scale: from 0.1s to 6h
<p>58 Series</p> 	<ul style="list-style-type: none"> - IECEx - ATEX: II 3G Ex ec nC IIC Gc - HazLoc Class I, Div. 2, Groups A, B, C, D - T5    <p>HazLoc</p>	<p>Relay interface modules</p> <ul style="list-style-type: none"> - 2 CO (DPDT) 10 A 250 V AC - 3 CO (3PDT) 8.5 A 250 V AC - 4 CO (4PDT) 6 A 250 V AC - Coil nominal voltage: 12 to 125 V DC 12 to 230 V AC - Supply status indication as standard - Box clamp and Push-in terminal available
<p>86 Series</p> 	<ul style="list-style-type: none"> - ATEX (II 3G Ex ec IIC Gc) - HazLoc Class I, Div. 2, Groups A, B, C, D - T6   <p>HazLoc</p>	<p>Timer modules for use in conjunction with Relay interface module 58 Series ATEX versions</p> <ul style="list-style-type: none"> - DIP-switch for selection 2 functions: <ul style="list-style-type: none"> AI: ON-Delay, DI: Interval - DIP-switch for selection 7 time scale: from 0.05s to 100h - LED indicator - Plug-in mount